

MICROPROCESSORS & MICROCONTROLLERS

LECTURE NOTES

B.TECH (III YEAR – II SEM) (2018-19)

Prepared by:

Mr. K Murali Krishna, Associate Professor

Mr.KDK Ajay, Assistant Professor

Department of Electronics and Communication Engineering



MALLA REDDY COLLEGE OF ENGINEERING & TECHNOLOGY

(Autonomous Institution – UGC, Govt. of India)

Recognized under 2(f) and 12 (B) of UGC ACT 1956

(Affiliated to JNTUH, Hyderabad, Approved by AICTE - Accredited by NBA & NAAC – 'A' Grade - ISO 9001:2015 Certified)
Maisammaguda, Dhulapally (Post Via. Kompally), Secunderabad – 500100, Telangana State, India

(R15A0414) MICROPROCESSORS AND MICROCONTROLLERS

OBJECTIVES:

1. To understand the basics of microprocessors and microcontrollers architectures and its functionalities
2. To develop an in-depth understanding of the operation of microprocessors and microcontrollers, machine language programming & interfacing techniques.
3. To design and develop Microprocessor/ microcontroller based systems for real time applications using low level language like ALP.

UNIT -I:

8086 Architecture: Architecture of 8086, Register Organization, Programming Model, Memory addresses, Memory Segmentation, Physical Memory Organization, Signal descriptions of 8086-Common Function Signals, Minimum and Maximum mode signals, Timing diagrams.

UNIT -II:

Instruction Set and Assembly Language Programming of 8086: Instruction formats, Addressing modes, Instruction Set, Assembler Directives, Procedures, Macros, Simple Programs involving Logical, Branch and Call Instructions, Sorting, Evaluating Arithmetic Expressions, String Manipulations.

UNIT -III:

I/O Interface: 8255 PPI, Various Modes of Operation and Interfacing to 8086, D/A and A/D Converter. stepper motor, Interfacing of DMA controller 8257

Interfacing with advanced devices: Memory Interfacing to 8086, Interrupt Structure of 8086, Vector Interrupt Table, Interrupt Service Routine, architecture of 8259

Communication Interface: Serial Communication Standards, Serial Data Transfer Schemes, 8251 USART Architecture and Interfacing.

UNIT -IV:

Introduction to Microcontrollers: Overview of 8051 Microcontroller, Architecture, I/O Ports, Memory Organization, Addressing Modes and Instruction set of 8051, Simple Programs, memory interfacing to 8051

UNIT -V:

8051 Real Time Control: Programming Timer Interrupts, Programming External Hardware Interrupts, Programming the Serial Communication Interrupts, Programming 8051 Timers and Counters

ARM Processor: Fundamentals, Registers , current program status register, pipeline, Interrupt and the vector table.

TEXT BOOKS:

1. D. V. Hall, Microprocessors and Interfacing, TMGH, 2nd Edition 2006.
2. Kenneth. J. Ayala, The 8051 Microcontroller , 3rd Ed., Cengage Learning.
3. ARM System Developer's Guide: Designing and Optimizing System Software- Andrew N. Sloss, Dominic Symes, Chris Wright, Elsevier Inc., 2007

REFERENCE BOOKS:

1. Advanced Microprocessors and Peripherals – A. K. Ray and K.M. Bhurchandani, TMH, 2nd Edition 2006.
2. The 8051Microcontrollers, Architecture and Programming and Applications -K.Uma Rao, Andhe Pallavi, Pearson, 2009.
3. Micro Computer System 8086/8088 Family Architecture, Programming and Design - Liu and GA Gibson, PHI, 2nd Ed.
4. Microcontrollers and Application - Ajay. V. Deshmukh, TMGH, 2005.

OUTCOMES:

After going through this course the student will be able to

1. The student will learn the internal organization of popular 8086/8051 microprocessors/microcontrollers.
2. The student will learn hardware and software interaction and integration.
3. The students will learn the design of microprocessors/microcontrollers-based systems

UNIT -I

8086 Architecture

- **Architecture of 8086**
- **Register Organization**
- **Programming Model**
- **Memory addresses**
- **Memory Segmentation**
- **Physical Memory Organization**
- **Signal descriptions of 8086- Common Function Signals**
- **Minimum and Maximum mode signals**
- **Timing diagrams**

UNIT-I

8086 Architecture

Introduction to Microprocessors

A microprocessor is a computer processor which incorporates the functions of a computer's central processing unit (CPU) on a single integrated circuit (IC), or at most a few integrated circuits

The microprocessor is a multipurpose, clock driven, register based, digital-integrated circuit which accepts binary data as input, processes it according to instructions stored in its memory, and provides results as output. Microprocessors contain both combinational logic and sequential digital logic. Microprocessors operate on numbers and symbols represented in the binary numeral system.

Generation of Microprocessors:

➤ INTEL 4004 (1971)

- 4-bit microprocessor
- 4 KB main memory
- 45 instructions
- PMOS technology
- was first programmable device which was used in calculators

➤ INTEL 8008 (1972)

- 8-bit version of 4004
- 16 KB main memory
- 48 instructions
- PMOS technology
- Slow

➤ Intel 8080 (1973)

- 8-bit microprocessor
- 64 KB main memory
- 2 microseconds clock cycle time
- 500,000 instructions/sec
- 10X faster than 8008
- NMOS technology
- Drawback was that it needed three power supplies.

- Small computers (Microcomputers) were designed in mid 1970's
Using 8080 as CPU.

➤ **INTEL 8086/8088**

Year of introduction 1978 for 8086 and 1979 for 8088

- 16-bit microprocessors
- Data bus width of 8086 is 16 bit and 8 bit for 8088
- 1 MB main memory
- 400 nanoseconds clock cycle time
- 6 byte instruction cache for 8086 and 4 byte for 8088
- Other improvements included more registers and additional instructions
- In 1981 IBM decided to use 8088 in its personal computer

➤ **INTEL 80186** (1982)

- 16-bit microprocessor-upgraded version of 8086
- 1 MB main memory
- Contained special hardware like programmable counters, interrupt controller etc.
- Never used in the PC
- But was ideal for systems that required a minimum of hardware .

➤ **INTEL 80286** (1983)

- 16-bit high performance microprocessor with memory management & protection
- 16 MB main memory
- Few additional instructions to handle extra 15 MB
- Instruction execution time is as little as 250 ns
- Concentrates on the features needed to implement MULTITASKING

➤ **Intel 80386** (1986)

➤ **Intel 80486** (1989)

➤ **Pentium** (1993)

➤ **Pentium pro**(1995)

➤ **Pentium ii** (1997)

➤ **Pentium iii** (1999)

➤ **Pentium iv** (2002)

➤ **Latest is Intel i9 processor**

General Architecture of Microprocessors

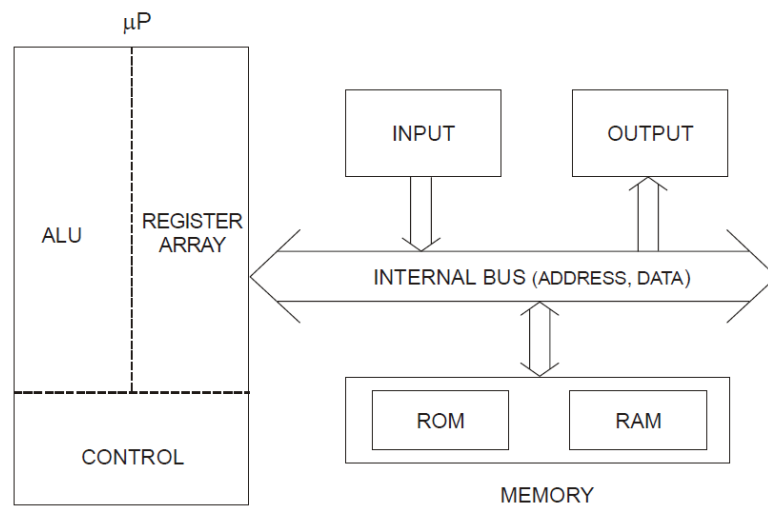


Figure 1.2 Architecture of Microprocessor

Buses

Figure shows busses interconnecting various blocks. These busses allow exchange of words between the blocks. A bus has a wire or line for each bit and thus allows exchange of all bits of a word in parallel. The processing of bits in the μP is also in parallel. The busses can thus be viewed as data highways. The width of a bus is the number of signal lines that constitute the bus.

Arithmetic-Logic Unit (ALU)

The arithmetic-logic unit is a combinational network that performs arithmetic and logical operations on the data.

Internal Registers

A number of registers are normally included in the microprocessor. These are used for temporary storage of data, instructions and addresses during execution of a program. Those in the Intel

Register Organization of 8086

8086 has a powerful set of registers containing general purpose and special purpose registers. All the registers of 8086 are 16-bit registers. The general purpose registers, can be used either 8-bit registers or 16-bit registers. The general purpose registers are either used for holding the data, variables and intermediate results temporarily or for other purpose like counter or for storing offset address for some particular addressing modes etc. The special purpose registers are used as segment registers, pointers, index registers or as offset storage registers for particular addressing modes. Fig 1.4 shows register organization of 8086. We will categorize the register set into four groups as follows:



Fig.1.4 Register organization of 8086 Microprocessor

General data Registers:

The registers AX, BX, CX, and DX are the general 16-bit registers.

AX Register: Accumulator register consists of two 8-bit registers AL and AH, which can be combined together and used as a 16-bit register AX. AL in this case contains the low-order byte of the word, and AH contains the high-order byte. Accumulator can be used for I/O operations, rotate and string manipulation.

BX Register: This register is mainly used as a base register. It holds the starting base location of a memory region within a data segment. It is used as offset storage for forming physical address in case of certain addressing mode.

CX Register: It is used as default counter or count register in case of string and loop instructions.

DX Register: Data register can be used as a port number in I/O operations and implicit operand or destination in case of few instructions. In integer 32-bit multiply and divide instruction the DX register contains high-order word of the initial or resulting number.

Segment registers:

To complete 1Mbyte memory is divided into 16 logical segments. The complete 1Mbyte memory segmentation is as shown in fig 1.5. Each segment contains 64Kbyte of memory. There are four segment registers.

Code segment (CS) is a 16-bit register containing address of 64 KB segment with processor instructions. The processor uses CS segment for all accesses to instructions referenced by instruction pointer (IP) register. CS register cannot be changed directly. The CS register is automatically updated during far jump, far call and far return instructions. It is used for addressing a memory location in the code segment of the memory, where the executable program is stored.

Stack segment (SS) is a 16-bit register containing address of 64KB segment with program stack. By default, the processor assumes that all data referenced by the stack pointer (SP) and base pointer (BP) registers is located in the stack segment. SS register can be changed directly using POP instruction. It is used for addressing stack segment of memory. The stack segment is that segment of memory, which is used to store stack data.

Data segment (DS) is a 16-bit register containing address of 64KB segment with program data. By default, the processor assumes that all data referenced by general registers (AX, BX, CX, DX) and index register (SI, DI) is located in the data segment. DS register can be changed directly using POP and LDS instructions. It points to the data segment memory where the data is resided.

Extra segment (ES) is a 16-bit register containing address of 64KB segment, usually with program data. By default, the processor assumes that the DI register references the ES segment in string manipulation instructions. ES register can be changed directly using POP and LES instructions. It also refers to segment which essentially is another data segment of the memory. It also contains data.

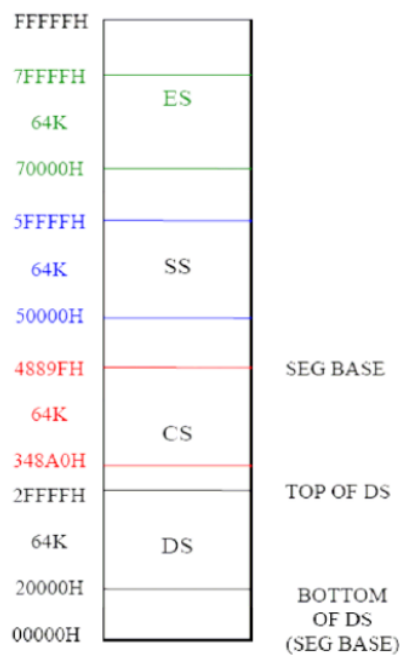


Fig1.5. Memory segmentation

Pointers and index registers.

The pointers contain within the particular segments. The pointers IP, BP, SP usually contain offsets within the code, data and stack segments respectively

Stack Pointer (SP) is a 16-bit register pointing to program stack in stack segment.

Base Pointer (BP) is a 16-bit register pointing to data in stack segment. BP register is usually used for based, based indexed or register indirect addressing.

Source Index (SI) is a 16-bit register. SI is used for indexed, based indexed and register indirect addressing, as well as a source data addresses in string manipulation instructions.

Destination Index (DI) is a 16-bit register. DI is used for indexed, based indexed and register indirect addressing, as well as a destination data address in string manipulation instructions.

Flag Register:

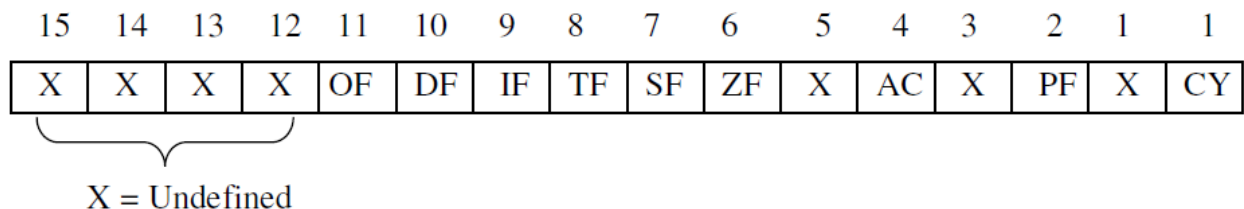


Fig1.6 . Flag Register of 8086

Flags Register determines the current state of the processor. They are modified automatically by CPU after mathematical operations, this allows to determine the type of the result, and to determine conditions to transfer control to other parts of the program. The 8086 flag register as shown in the fig 1.6. 8086 has 9 active flags and they are divided into two categories:

1. Conditional Flags
2. Control Flags

Conditional flags are as follows:

Carry Flag (CY): This flag indicates an overflow condition for unsigned integer arithmetic. It is also used in multiple-precision arithmetic.

Auxiliary Flag (AC): If an operation performed in ALU generates a carry/borrow from lower nibble (i.e. D0 – D3) to upper nibble (i.e. D4 – D7), the AC flag is set i.e. carry given by D3 bit to D4 is AC flag. This is not a general-purpose flag, it is used internally by the Processor to perform Binary to BCD conversion.

Parity Flag (PF): This flag is used to indicate the parity of result. If lower order 8-bits of the result contains even number of 1's, the Parity Flag is set and for odd number of 1's, the Parity flag is reset.

Zero Flag (ZF): It is set; if the result of arithmetic or logical operation is zero else it is reset.

Sign Flag (SF):In sign magnitude format the sign of number is indicated by MSB bit. If the result of operation is negative, sign flag is set.

Control Flags


Control flags are set or reset deliberately to control the operations of the execution unit. Control flags are as follows:

Trap Flag (TF): It is used for single step control. It allows user to execute one instruction of a program at a time for debugging. When trap flag is set, program can be run in single step mode.

Interrupt Flag (IF):It is an interrupt enable/disable flag. If it is set, the maskable interrupt of 8086 is enabled and if it is reset, the interrupt is disabled. It can be set by executing instruction `sti` and can be cleared by executing `cli` instruction.

Direction Flag (DF):It is used in string operation. If it is set, string bytes are accessed from higher memory address to lower memory address. When it is reset, the string bytes are accessed from lower memory address to higher memory address.

8086 Architecture

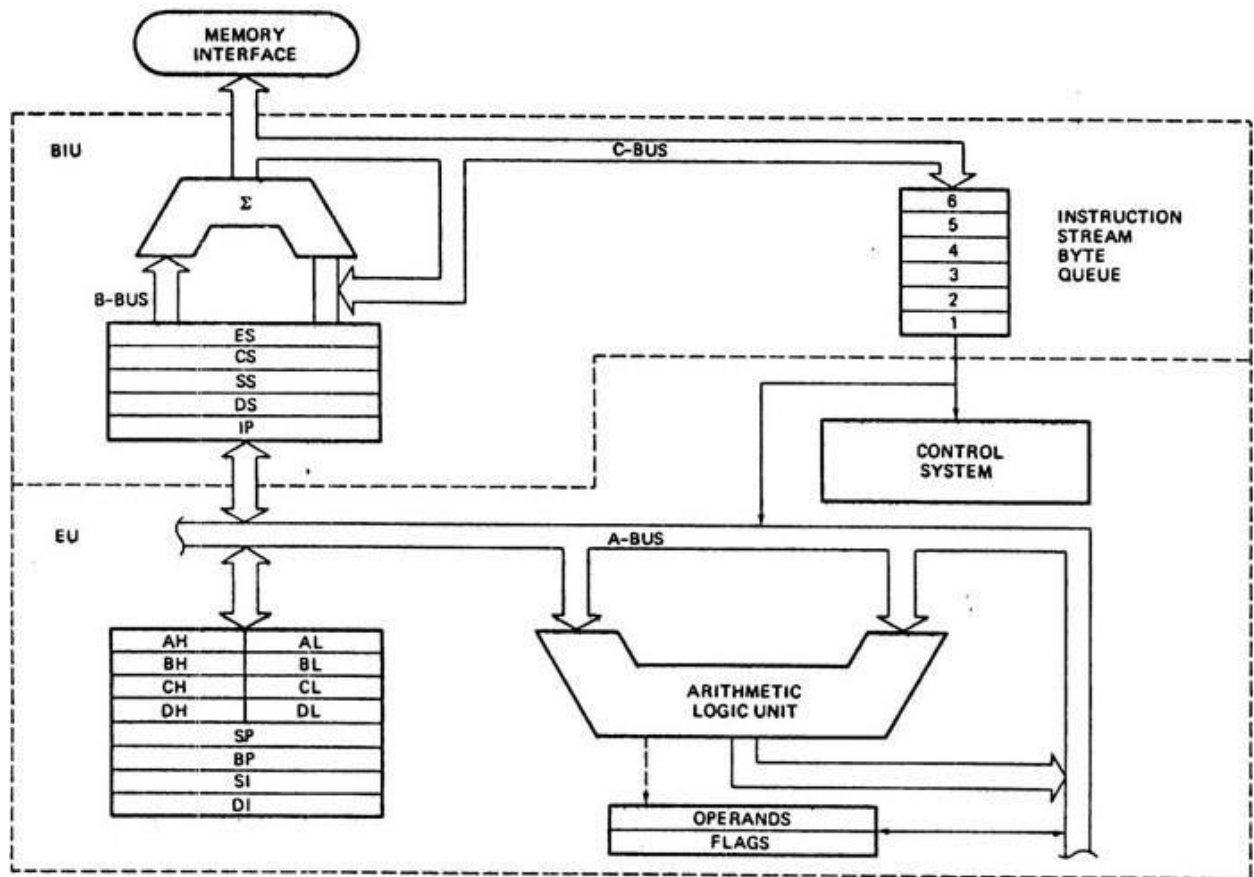

The 8086 is mainly divided into mainly two blocks

1. Execution Unit (EU)
2. Bus interface Unit (BIU)

Dividing the work between these two will speedup the processing

1) EXECUTION UNIT(EU)

The Execution unit tells the BIU where to fetch instructions or data from

- decodes instructions and
- Executes instructions

The Execution unit contains:

- 1) Control circuitry
- 2) ALU
- 3) FLAGS
- 4) General purpose Registers
- 5) Pointer and Index Registers

Control Circuitry:

- It directs internal operations.

- A decoder in the EU translates instructions fetched from memory into series of actions which the EU carries out

Arithmetic Logic Unit:

16 bit ALU

Used to carry the operations

- ADD
- SUBTRACT
- XOR
- INCREMENT
- DECREMENT
- COMPLEMENT
- SHIFT BINARY NUMBERS

FLAG REGISTERS:

- A flag is a flip flop that indicates some condition produced by execution of an instruction or controls certain operation of the EU.
- It is 16 bit
- It has nine active flags

Divided into two types

1. Conditional flags
2. Control flags

Conditional Flags

Carry Flag (CY): This flag indicates an overflow condition for unsigned integer arithmetic. It is also used in multiple-precision arithmetic.

Auxiliary Flag (AC): If an operation performed in ALU generates a carry/borrow from lower nibble (i.e. D0 – D3) to upper nibble (i.e. D4 – D7), the AC flag is set i.e. carry given by D3 bit to D4 is AC flag. This is not a general-purpose flag, it is used internally by the Processor to perform Binary to BCD conversion.

Parity Flag (PF): This flag is used to indicate the parity of result. If lower order 8-bits of the result contains even number of 1's, the Parity Flag is set and for odd number of 1's, the Parity flag is reset.

Zero Flag (ZF): It is set; if the result of arithmetic or logical operation is zero else it is reset.

Sign Flag (SF): In sign magnitude format the sign of number is indicated by MSB bit. If the result of operation is negative, sign flag is set.

Control Flags

Control flags are set or reset deliberately to control the operations of the execution unit. Control flags are as follows:

Trap Flag (TF): It is used for single step control. It allows user to execute one instruction of a program at a time for debugging. When trap flag is set, program can be run in single step mode.

Interrupt Flag (IF): It is an interrupt enable/disable flag. If it is set, the maskable interrupt of 8086 is enabled and if it is reset, the interrupt is disabled. It can be set by executing instruction `sti` and can be cleared by executing `ccli` instruction.

Direction Flag (DF): It is used in string operation. If it is set, string bytes are accessed from higher memory address to lower memory address. When it is reset, the string bytes are accessed from lower memory address to higher memory address.

General Purpose Registers:

The 8086 general purpose registers are similar to those of earlier generations 8080 and 8085. It was designed in such a way that many programs written for 8080 and 8085 could easily be translated to run on 8086. The advantage of using internal registers for the temporary storage of data is that since data already in the EU, it can be accessed much more quickly than it could be accessed from external memory.

General Purpose Registers

The registers AX, BX, CX, and DX are the general 16-bit registers.

AX Register: Accumulator register consists of two 8-bit registers AL and AH, which can be combined together and used as a 16-bit register AX. AL in this case contains the low-order byte of the word, and AH contains the high-order byte. Accumulator can be used for I/O operations, rotate and string manipulation.

BX Register: This register is mainly used as a base register. It holds the starting base location of a memory region within a data segment. It is used as offset storage for forming physical address in case of certain addressing mode.

CX Register: It is used as default counter or count register in case of string and loop instructions.

DX Register: Data register can be used as a port number in I/O operations and implicit operand or destination in case of few instructions. In integer 32-bit multiply and divide instruction the DX register contains high-order word of the initial or resulting number.

2) **BUS INTERFACE UNIT (BIU)**

The BIU sends out

- Addresses
- Fetches instructions from memory
- Read data from ports and memory

Or

The BIU handles all transfer of data and addresses on the buses for the Execution Unit

The Bus interface unit contains

- 1) Instruction Queue
- 2) Instruction pointer
- 3) Segment registers
- 4) Address Generator

Instruction Queue:

BIU gets upto 6 bytes of next instructions and stores them in the instruction queue. When EU executes instructions and is ready for its next instruction, then it simply reads the instruction from this instruction queue resulting in increased execution speed. Fetching the next instruction while the current instruction executes is called **pipelining**.(based on FIFO) .This is much faster than sending out an addresses to the system memory and waiting for memory to send back the next instruction byte or bytes .Here the Queue will be dumped and then reloaded from the new Address.

Segment Register:

The 8086 20 bit addresses So it can address upto 2^{20} in memory (1 Mbyte) but at any instant it can address upto 4 64 KB segments. This four segments holds the upper 16 bits of the starting address of four memory segments that the 8086 is working with it at particular time .The BIU always inserts zeros for the lowest 4 bits of the 20 bit starting address

Example : If the code segment register contains 348AH then the code segment starts at 348A0H .In other words a 64Kbyte segment can be located anywhere within 1MByte address Space but the segment will always starts at an address with zeros in the lowest 4 bits

Stack: is a section of memory set aside to store addresses and data while subprogram executes is often called segment base . The stack segment register always holds the upper 16 bit starting address of program stack. The extra segment register and data segment register is used to hold the upper 16 bit starting addresses of two memory segments that are used for data .

Instruction Pointer holds the 16 bit address or offset of the next code byte within the code segment. The value contained in the Instruction Pointer called as Offset because the value must be added to the segment base address in CS to produce the required 20 bit address.

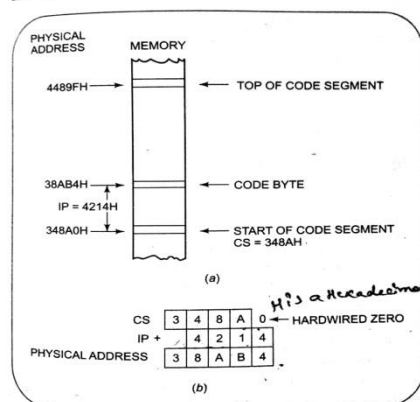


Fig. 2.10 Addition of IP to CS to produce the physical address of the code byte, (a) Diagram, (b) Computation.

CS register contains the Upper 16 bit of the starting address of the code segment in the 1 Mbyte address range the instruction pointer contains a 16 bit offset which tells wherein that 64 Kbyte code segment the next instruction byte has to be fetched from.

Stack Register and Stack Pointer:

Stack: is a section of memory set aside to store addresses and data while subprogram executes is often called segment base . The stack segment register always holds the upper 16 bit starting address of program stack. The Stack pointer (SP) holds the 16 bit offset from the starting of the segment to the memory location where a word was most recently stored .The memory location where the word is stored is called as top of the stack

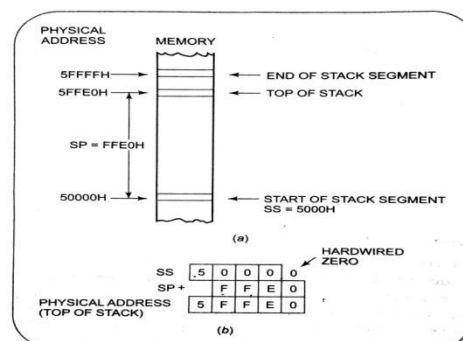


Fig. 2.11 Addition of SS and SP to produce the physical address of the top of the stack, (a) Diagram, (b) Computation.

Pointer and Index registers:

In addition to stack pointer register EU has

Base pointer Register (BP)

Source Pointer Register(SP)

Destination Pointer Register(DP)

These three registers are used to store temporary storage of data like general purpose registers. They hold the 16 bit offset data of the data word in one of the segment

Programming model


How can a 20-bit address be obtained, if there are only 16-bit registers?

However, the largest register is only 16 bits (64k); so physical addresses have to be calculated. These calculations are done in hardware within the microprocessor.

The 16-bit contents of segment register gives the starting/ base address of particular segment. To address a specific memory location within a segment we need an offset address. The offset address is also 16-bit wide and it is provided by one of the associated pointer or index register.

To be able to program a microprocessor, one does not need to know all of its hardware architectural features. What is important to the programmer is being aware of the various registers within the device and to understand their purpose, functions, operating capabilities, and limitations.

The above figure illustrates the software architecture of the 8086 microprocessor. From this diagram, we see that it includes fourteen 16-bit internal registers: the instruction pointer (IP), four data registers (AX, BX, CX, and DX), two pointer registers (BP and SP), two index registers (SI and DI), four segment registers (CS, DS, SS, and ES) and status register (SR), with nine of its bits implemented as status and control flags.

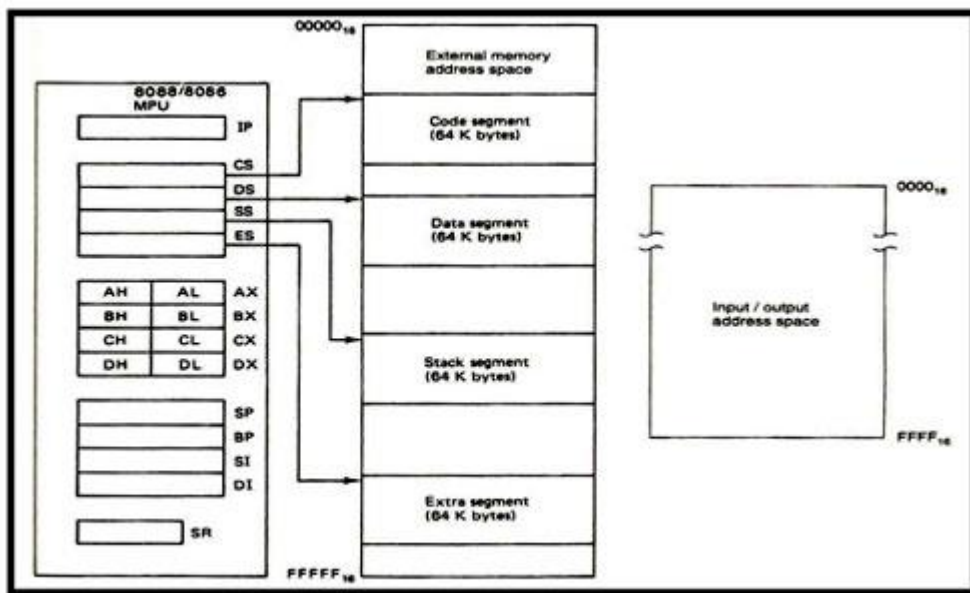


The point to note is that the beginning segment address must begin at an address divisible by 16. Also note that the four segments need not be defined separately. It is allowable for all four segments to completely overlap (CS = DS = ES = SS).

Logical and Physical Address


Addresses within a segment can range from address 00000h to address 0FFFFh. This corresponds to the 64K-bytelength of the segment. An address within a segment is called an offset or logical address.

A logical address gives the displacement from the base address of the segment to the desired location within it, as opposed to its "real" address, which maps directly anywhere into the 1 MByte memory space. This "real" address is called the physical address.

What is the difference between the physical and the logical address? The physical address is 20 bits long and corresponds to the actual binary code output by the BIU on the address bus lines. The logical address is an offset from location 0 of a given segment.

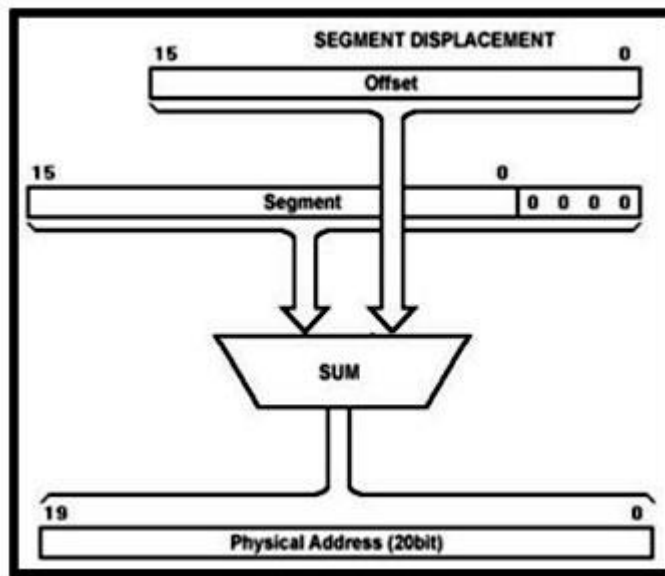


You should also be careful when writing addresses on paper to do so clearly. To specify the logical address XXXX in the stack segment, use the convention SS:XXXX, which is equal to $[SS] * 16 + XXXX$.

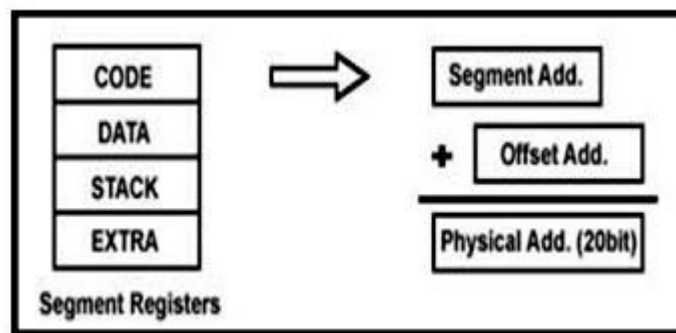

Logical address is in the form of: Base Address: Offset Offset is the displacement of the memory location from the starting location of the segment. To calculate the physical address of the memory, BIU uses the following formula:

$$\text{Physical Address} = \text{Base Address of Segment} * 16 + \text{Offset}$$

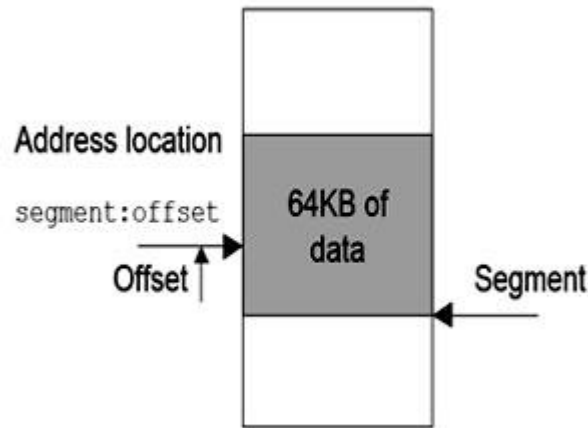

Example:

The value of Data Segment Register (DS) is 2222H.

To convert this 16-bit address into 20-bit, the BIU appends 0H to the LSB (by multiplying with 16) of the address. After appending, the starting address of the Data Segment becomes 22220H.

Data at any location has a logical address specified as: 2222H: 0016H

Where 0016H is the offset, 2222 H is the value of DS Therefore the physical address: $22220H + 0016H$
: 22236 H

The following table describes the default offset values to the corresponding memory segments.

Segment	Offset Registers	Function
CS	IP	Address of the next instruction
DS	BX, DI, SI	Address of data
SS	SP, BP	Address in the stack
ES	BX, DI, SI	Address of destination data (for string operations)

Some of the advantages of memory segmentation in the 8086 are as follows:

- With the help of memory segmentation a user is able to work with registers having only 16-bits.
- The data and the user's code can be stored separately allowing for more flexibility.

- Also due to segmentation the logical address range is from 0000H to FFFFH the code can be loaded at any location in the memory.


Physical memory organization:

The 8086's 1Mbyte memory address space is divided into two independent 512Kbyte banks: the low (even) bank and the high (odd) bank. Data bytes associated with an even address (0000016, 0000216, etc.) reside in the low bank, and those with odd addresses (0000116, 0000316, etc.) reside in the high bank.

Address bits A1 through A19 select the storage location that is to be accessed. They are applied to both banks in parallel. A0 and bank high enable (BHE) are used as bank-select signals.


The four different cases that happen during accessing data:

Case 1: When a byte of data at an even address (such as X) is to be accessed:

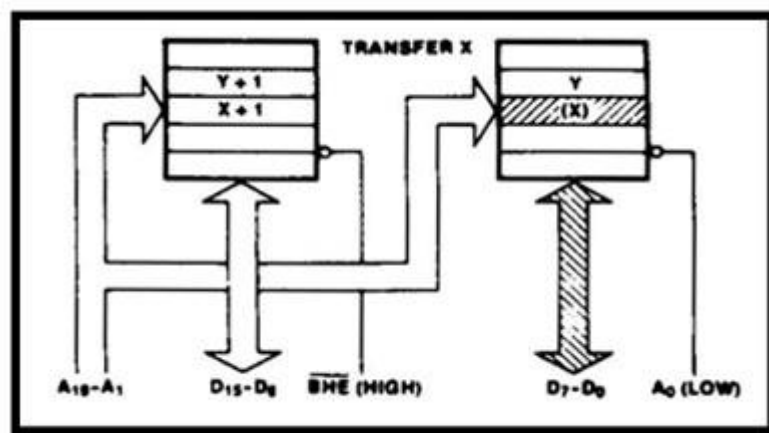


- A0 is set to logic 0 to enable the low bank of memory.
- BHE is set to logic 1 to disable the high bank.

Case 2: When a byte of data at an odd addresses (such as X+1) is to be accessed:

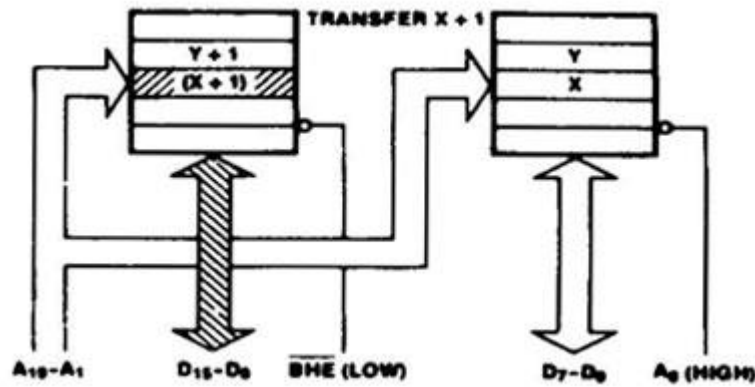

- A0 is set to logic 1 to disable the low bank of memory.
- BHE is set to logic 0 to enable the high bank.


Case 3: When a word of data at an even address (aligned word) is to be accessed:

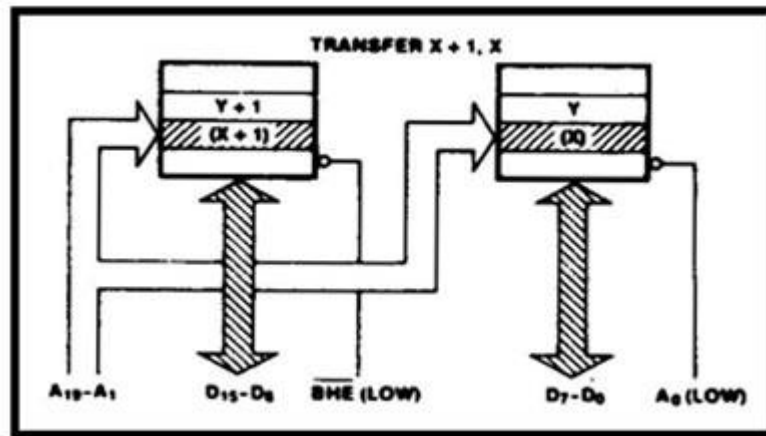


- A0 is set to logic 0 to enable the low bank of memory.
- BHE is set to logic 0 to enable the high bank.

Case 4: When a word of data at an odd address (misaligned word) is to be accessed, then the 8086 needs two bus cycles to access it:

a) During the first bus cycle, the odd byte of the word (in the high bank) is addressed

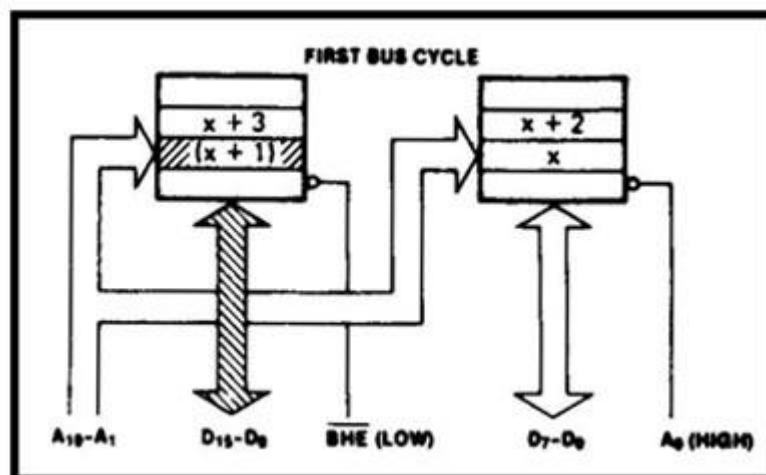


- A0 is set to logic 1 to disable the low bank of memory
 - BHE is set to logic 0 to enable the high bank.
- b) During the second bus cycle, the odd byte of the word (in the low bank) is addressed

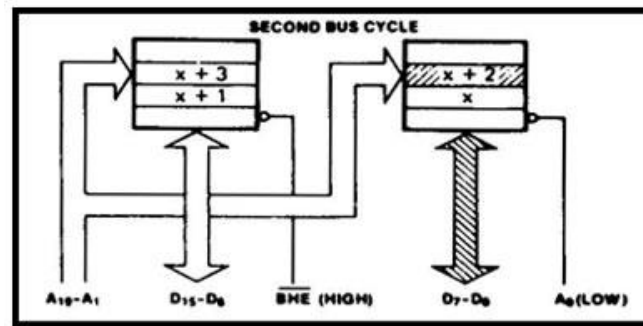

- A0 is set to logic 0 to enable the low bank of memory.
- BHE is set to logic 1 to disable the high bank.

Signal Description of 8086 Microprocessor

The 8086 Microprocessor is a 16-bit CPU available in 3 clock rates, i.e. 5, 8 and 10MHz, packaged in a 40 pin Cerdip or plastic package. The 8086 Microprocessor operates in single processor or multiprocessor configurations to achieve high performance. The pin configuration is as shown in fig1. Some of the pins serve a particular function in minimum mode (single processor mode) and others function in maximum mode (multiprocessor mode) configuration.

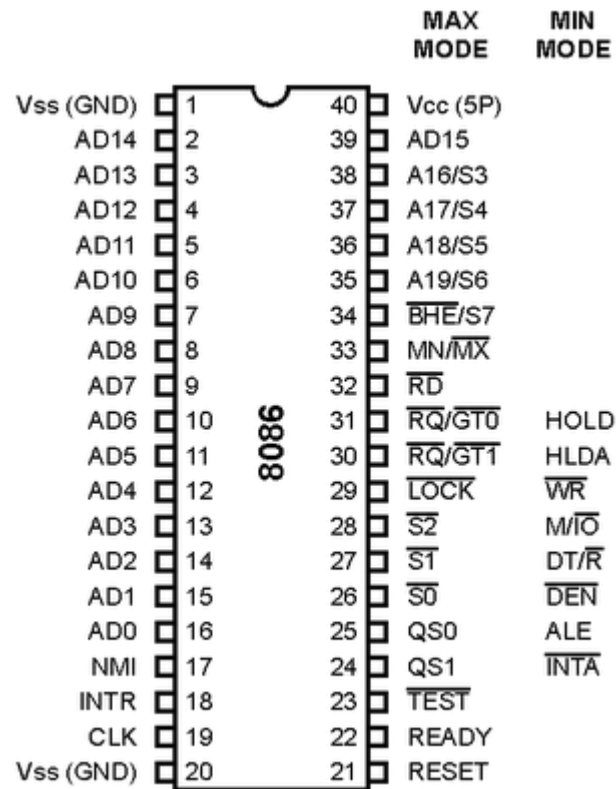

The 8086 signals can be categorized in three groups. The first are the signals having common functions in minimum as well as maximum mode, the second are the signals which have special functions in minimum mode and third are the signals having special functions for maximum mode.

The following signal description is common for both the minimum and maximum modes.

AD15-AD0:

These are the time multiplexed memory I/O address and data lines. Address remains on the lines during T1 state, while the data is available on the data bus during T2, T3, TW and T4. Here T1, T2, T3, T4 and TW are the clock states of a machine cycle. TW is await state. These lines are active high and float to a tristate during interrupt acknowledge and local bus hold acknowledge cycles.

A19/S6, A18/S5, A17/S4, A16/S3:

These are the time multiplexed address and status lines. During T1, these are the most significant address lines or memory operations. During I/O operations, these lines are low. During memory or I/O operations, status information is available on those lines for T2, T3, TW and T4. The status of

the interrupt enable flag bit(displayed on S5) is updated at the beginning of each clock cycle. The S4 and S3 combinedly indicate which segment register is presently being used for memory accesses as shown in Table 1.1.

These lines float to tri-state off (tristated) during the local bus hold acknowledge. The status line S6 is always low(logical). The address bits are separated from the status bits using latches controlled by the ALE signal.

S4	S3	Indication
0	0	Alternate Data
0	1	Stack
1	0	Code or none
1	1	Data

Table 1.1 Bus High Enable/Status

BHE/S7 (Active Low):

The bus high enable signal is used to indicate the transfer of data over the higher order (D15-D8) data bus as shown in Table 1.2. It goes low for the data transfers over D15-D8 and is used to derive chip selects of odd address memory bank or peripherals. **$\overline{\text{BHE}}$** is low during T1 for read, write and interrupt acknowledge cycles, when- ever a byte is to be transferred on the higher byte of the data bus. The status information is available during T2, T3 and T4. The signal is active low and is tristated during 'hold'. It is low during T1 for the first pulse of the interrupt acknowledge cycle.

$\overline{\text{BHE}}$	A ₀	Indication
0	0	Whole Word
0	1	Upper byte from or to odd address
1	0	Upper byte from or to even address
1	1	None

$\overline{\text{RD}}$ -Read:

Read signal, when low, indicates the peripherals that the processor is performing a memory or I/O read operation. **$\overline{\text{RD}}$** is active low and shows the state for T2, T3, TW of any read cycle. The signal remains tristated during the 'hold acknowledge'.

READY:

This is the acknowledgement from the slow devices or memory that they have completed the data transfer. The signal made available by the devices is synchronized by the 8284A clock generator to provide ready input to the 8086. The signal is active high.

INTR-Interrupt Request:

This is a level triggered input. This is sampled during the last clock cycle of each instruction to determine the availability of the request. If any interrupt request is pending, the processor enters the interrupt acknowledge cycle. This can be internally masked by resetting the interrupt enable flag. This signal is active high and internally synchronized.

TEST:

This input is examined by a 'WAIT' instruction. If the TEST input goes low, execution will continue, else, the processor remains in an idle state. The input is synchronized internally during each clock cycle on leading edge of clock.

NMI-Non-maskable Interrupt:

This is an edge-triggered input which causes a Type2 interrupt. The NMI is not maskable internally by software. A transition from low to high initiates the interrupt response at the end of the current instruction. This input is internally synchronized.

RESET:

This input causes the processor to terminate the current activity and start execution from FFFF0H. The signal is active high and must be active for at least four clock cycles. It restarts execution when the RESET returns low. RESET is also internally synchronized.

CLK-Clock Input:

The clock input provides the basic timing for processor operation and bus control activity. Its an asymmetric square wave with 33% duty cycle. The range of frequency for different 8086 versions is from 5MHz to 10MHz.

VCC :

+5V power supply for the operation of the internal circuit. GND ground for the internal circuit.

MN/MX :

The logic level at this pin decides whether the processor is to operate in either minimum (single processor) or maximum (multiprocessor) mode. The following pin functions are for the minimum mode operation of 8086.

M/IO -Memory/IO:

This is a status line logically equivalent to S2 in maximum mode. When it is low, it indicates the CPU is having an I/O operation, and when it is high, it indicates that the CPU is having a memory operation. This line becomes active in the previous T4 and remains active till final T4 of the current cycle. It is tristated during local bus "hold acknowledge".

$\overline{\text{INTA}}$ -Interrupt Acknowledge:

This signal is used as a read strobe for interrupt acknowledge cycles. In other words, when it goes low, it means that the processor has accepted the interrupt. It is active low during T2, T3 and TW of each interrupt acknowledge cycle.

ALE-Address latch Enable:

This output signal indicates the availability of the valid address on the address/data lines, and is connected to latch enable input of latches. This signal is active high and is never tristated.

$\overline{\text{DT}}/\text{R}$ -Data Transmit/Receive:

This output is used to decide the direction of data flow through the transreceivers (bidirectional buffers). When the processor sends out data, this signal is high and when the processor is receiving data, this signal is low. Logically, this is equivalent to S1 in maximum mode. Its timing is the same as M/IO. This is tristated during 'hold acknowledge'.

$\overline{\text{DEN}}$ -Data Enable

This signal indicates the availability of valid data over the address/data lines. It is used to enable the transreceivers (bidirectional buffers) to separate the data from the multiplexed address/data signal. It is active from the middle of T2 until the middle of T4. DEN is tristated during 'hold acknowledge' cycle.

HOLD, HLDA-Hold/Hold Acknowledge:

When the HOLD line goes high, it indicates to the processor that another master is requesting the bus access. The processor, after receiving the HOLD request, issues the hold acknowledge signal on HLDA pin, in the middle of the next clock cycle after completing the current bus (instruction)

cycle. At the same time, the processor floats the local bus and control lines. When the processor detects the HOLD line low, it lowers the HLDA signal. HOLD is an asynchronous input, and it should be externally synchronized.

S₂, S₁, S₀ -Status Lines:

These are the status lines which reflect the type of operation, being carried out by the processor. These become active during T₄ of the previous cycle and remain active during T₁ and T₂ of the current bus cycle. The status lines return to passive state during T₃ of the current bus cycle so that they may again become active for the next bus cycle during T₄. Any change in these lines during T₃ indicates the starting of a new cycle, and return to passive state indicates end of the bus cycle. These status lines are encoded in table 1.3

S ₂ —	S ₁ —	S ₀ —	Indication
0	0	0	Interrupt Acknowledge
0	0	1	Read I/O Port
0	1	0	Write I/O Port
0	1	1	Halt
1	0	0	Code Access
1	0	1	Read memory
1	1	0	Write memory
1	1	1	Passive

Table 1.3

LOCK:

This output pin indicates that other system bus masters will be prevented from gaining the system bus, while the LOCK signal is low. The LOCK signal is activated by the 'LOCK' prefix instruction and remains active until the completion of the next instruction. This floats to tri-state off during "hold acknowledge". When the CPU is executing a critical instruction which requires the system bus, the LOCK prefix instruction ensures that other processors connected in the system will not gain the control of the bus. The 8086, while executing the prefixed instruction, asserts the bus lock signal output, which may be connected to an external bus controller.

QS₁, QS₀-Queue Status:

These lines give information about the status of the codeprefetch queue. These are active during the CLK cycle after which the queue operation is performed. These are encoded as shown in Table 1.4.

QS ₁	QS ₀	Indication
0	0	No operation
0	1	First byte of opcode from the queue
1	0	Empty queue
1	1	Subsequent byte from the queue

Table 1.4

$\overline{RQ/GT_0}$, $\overline{RQ/GT_1}$ -ReQuest/Grant:

These pins are used by other local bus masters, in maximum mode, to force the processor to release the local bus at the end of the processor's current bus cycle. Each of the pins is bidirectional with $\overline{RQ/GT_0}$ having higher priority than $\overline{RQ/GT_1}$. $\overline{RQ/GT}$ pins have internal pull-up resistors and may be left unconnected. The request! Grant sequence is as follows:

1. A pulse one clock wide from another bus master requests the bus access to 8086.
2. During T4 (current) or T1 (next) clock cycle, a pulse one clock wide from 8086 to the requesting master, indicates that the 8086 has allowed the local bus to float and that it will enter the "hold acknowledge" state at next clock cycle. The CPU's bus interface unit is likely to be disconnected from the local bus of the system.
3. A one clock wide pulse from the another master indicates to 8086 that the 'hold' request is about to end and the 8086 may regain control of the local bus at the next clock cycle.

Minimum Mode 8086 System and Timings

In a minimum mode 8086 system, the microprocessor 8086 is operated in minimum mode by strapping its MN/MX* pin to logic1. In this mode, all the control signals are given out by the microprocessor chip itself. There is a single microprocessor in the minimum mode system. The remaining components in the system are latches, transreceivers, clock generator, memory and I/O devices. Some type of chip selection logic may be required for selecting memory or I/O devices, depending upon the address map of the system.

Latches:

The latches are generally buffered output D-type flip-flops, like, 74LS373 or 8282. They are used for separating the valid address from the multiplexed address/data signals and are controlled by the ALE signal generated by 8086.

Transreceivers

Transreceivers are the bidirectional buffers and some times they are called as data amplifiers. They are required to separate the valid data from the time multiplexed address/data signal. They are controlled by two signals, namely, $\overline{DEN}^*$ and $\overline{DT/R}^*$. The $\overline{DEN}^*$ signal indicates that the valid data is available on the data bus, while $\overline{DT/R}^*$ indicates the direction of data, i.e. from or to the processor.

Memory:

The system contains memory for the monitor and users program storage. Usually, EPROMS are used for monitor storage, while RAMs for users program storage.

IO Devices:

A system may contain I/O devices for communication with the processor as well as some special purpose I/O devices.

Clock Generator:

The clock generator generates the clock from the crystal oscillator and then shapes it and divides to make it more precise so that it can be used as an accurate timing reference for the system. The clock generator also synchronizes some external signals with the system clock.

The read (RD) signal causes the addressed device to enable its data bus drivers. After RD* goes low, the valid data is available on the data bus.


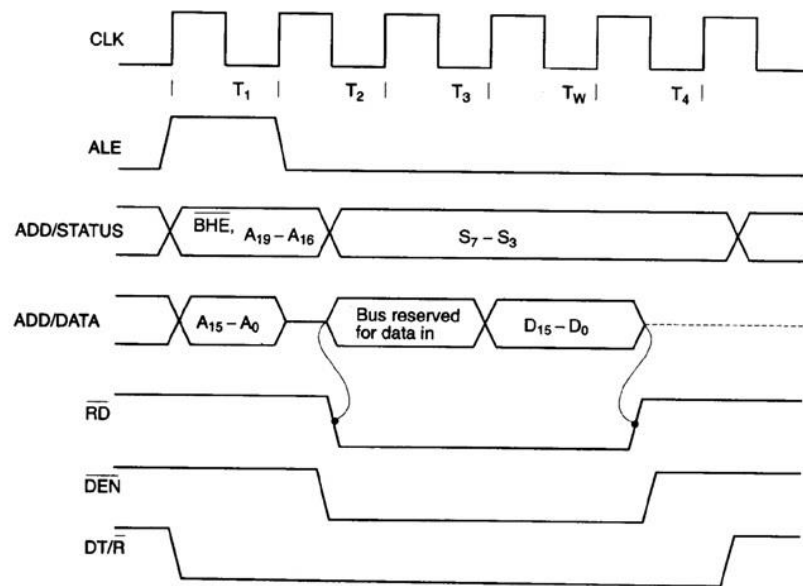


Fig.1.9(a) Read Cycle Timing Diagram for Minimum Mode

The addressed device will drive the READY line high, when the processor returns the read signal to high level, the addressed device will again tristate its bus drivers.

Timing diagram for write cycle:

A write cycle also begins with the assertion of ALE and the emission of the address. The M/IO* signal is again asserted to indicate a memory or I/O operation. In T2 after sending the address in T1 the processor sends the data to be written to the addressed location. The data remains on the bus until middle of T4 state. The WR* becomes active at the beginning of T2.

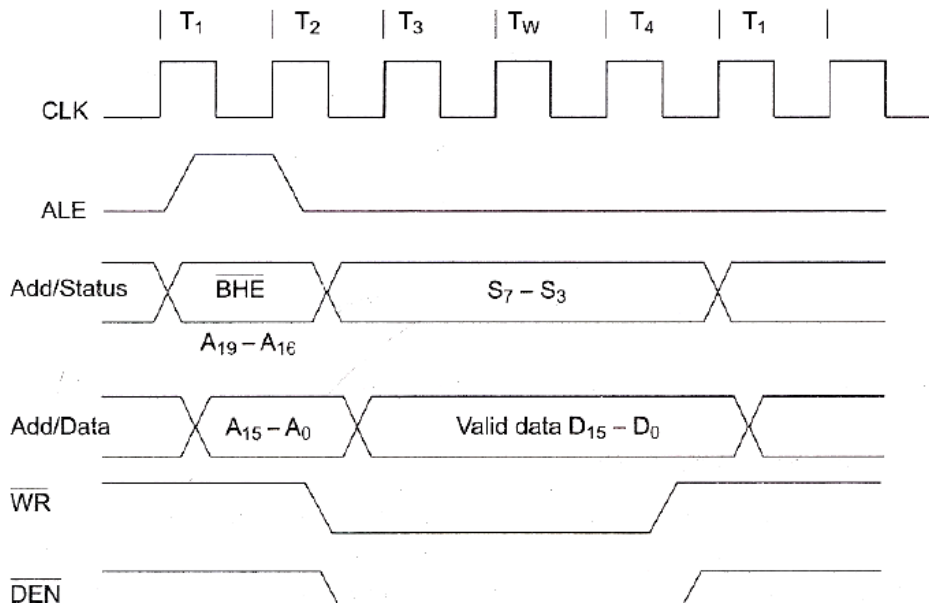


The BHE* and A0 signals are used to select the proper byte or bytes of memory or I/O word to be read or written. The M/IO*, RD* and WR* signals indicate the types of data transfer as specified in Table

M/IO	RD	WR	Transfer Type
0	0	1	I/O read
0	1	0	I/O write
1	0	1	Memory read
1	1	0	Memory write

HOLD Response Sequence


The HOLD pin is checked at the end of the each bus cycle. If it is received active by the processor before T4 of the previous cycle or during T1 state of the current cycle, the CPU activities HLDA in the next clock cycle and for the succeeding bus cycles, the bus will be given to another requesting master. The control control of the bus is not regained by the processor until the requesting master does not drop the HOLD pin low. When the request is dropped by the requesting master, the HLDA is dropped by the processor at the trailing edge of the next clock as shown in fig

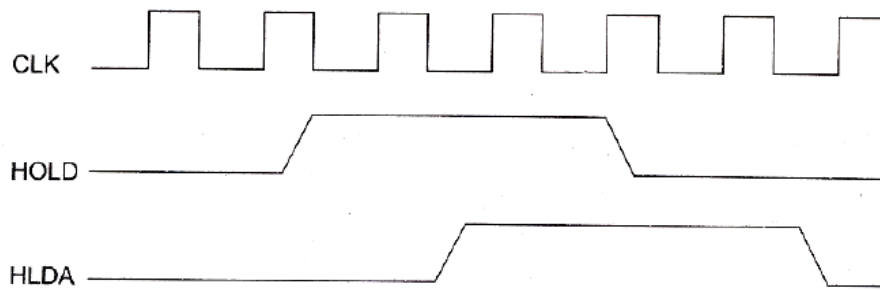

Maximum Mode 8086 System and Timings

In the maximum mode, the 8086 is operated by strapping the MN/MX* pin to ground. In this mode, the processor derives the status signals S2*, S1* and S0*. Another chip called bus controller derives the control signals using this status information. In the maximum mode, there may be more than one microprocessor in the system configuration. The other components in the system are the same as in the minimum mode system. The general system organization is as shown in the fig1.1

The basic functions of the bus controller chip IC8288, is to derive control signals like RD* and WR* (for memory and I/O devices), DEN*, DT/R*, ALE, etc. using the information made available by the processor on the status lines. The bus controller chip has input lines S2*, S1* and S0* and CLK. These inputs to 8288 are driven by the CPU. It derives the outputs ALE, DEN*, DT/R*, MWTC*, AMWC*, IORC*, IOWC* and AIOWC*. The AEN*, IOB and CEN pins are specially useful for multiprocessor systems. AEN* and IOB are generally grounded. CEN pin is usually tied to +5V.

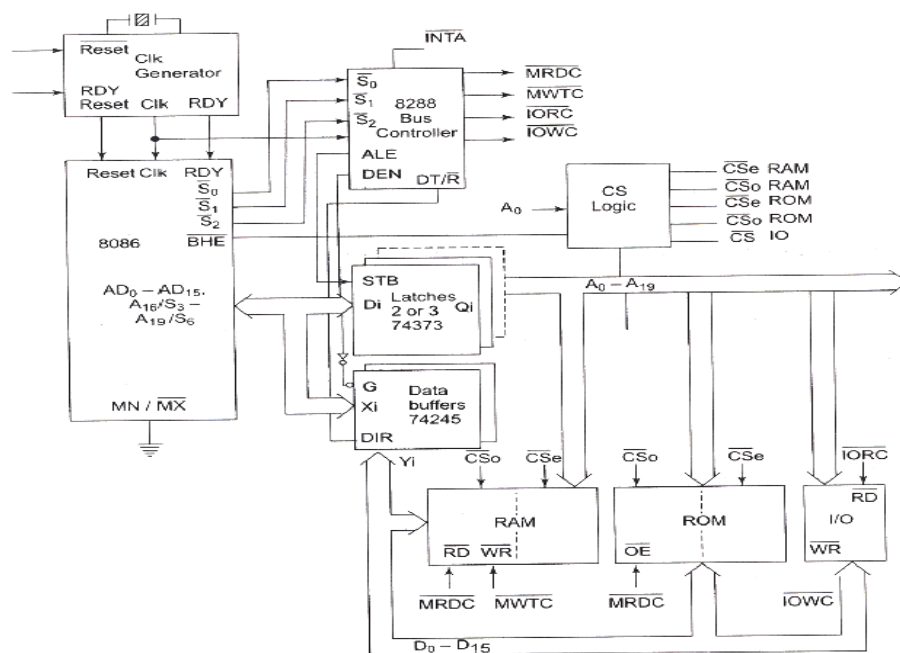

INTA* pin is used to issue two interrupt acknowledge pulses to the interrupt controller or to an interrupting device. IORC*, IOWC* are I/O read command and I/O write command signals respectively. These signals enable an IO interface to read or write the data from or to the addressed port. The MRDC*, MWTC* are memory read command and memory write command signals respectively and may be used as memory read and write signals. All these command signals instruct the memory to accept or send data from or to the bus. For both of these write command signals, the advanced signals namely AIOWC* and AMWTC* are available. They also serve the same purpose, but are activated one clock cycle earlier than the IOWC* and MWTC* signals, respectively. The maximum mode system is shown in fig. 1.1.

The maximum mode system timing diagrams are also divided in two portions as read (input) and write (output) timing diagrams. The address/data and address/status timings are similar to the minimum mode. ALE is asserted in T1, just like minimum mode. The only difference lies in the status signals used and the available control and advanced command signals. The fig. 1.2 shows the maximum mode timings for the read operation while the fig. 1.3 shows the same for the write operation.

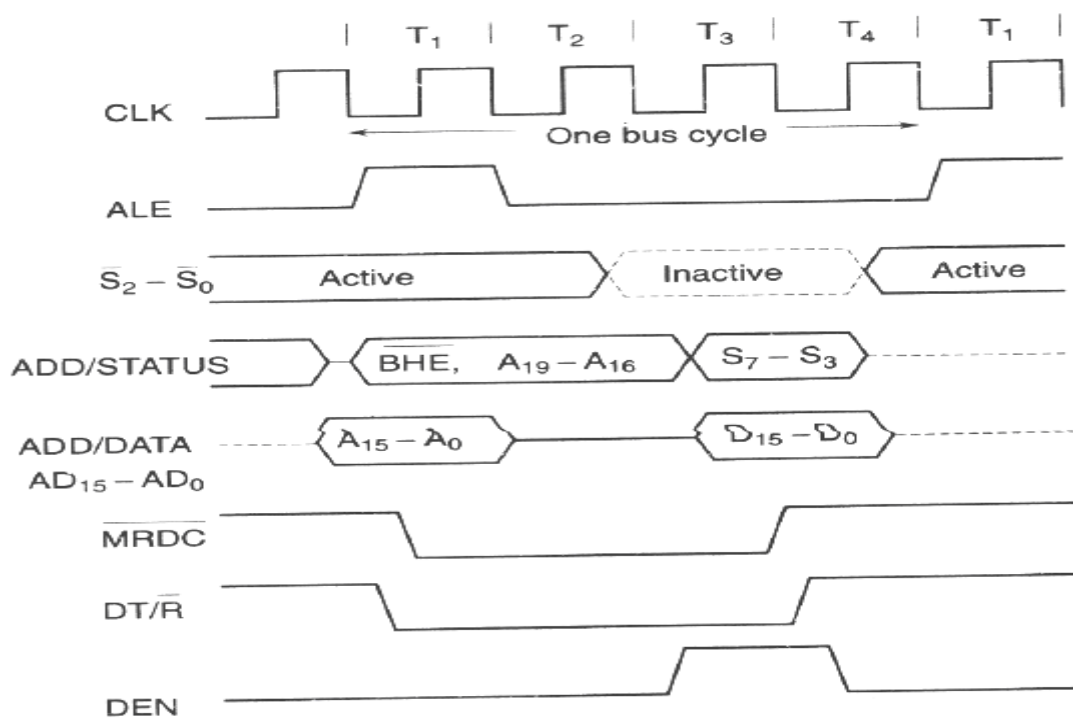


Fig. 1.2 Memory Read Timing in Maximum Mode

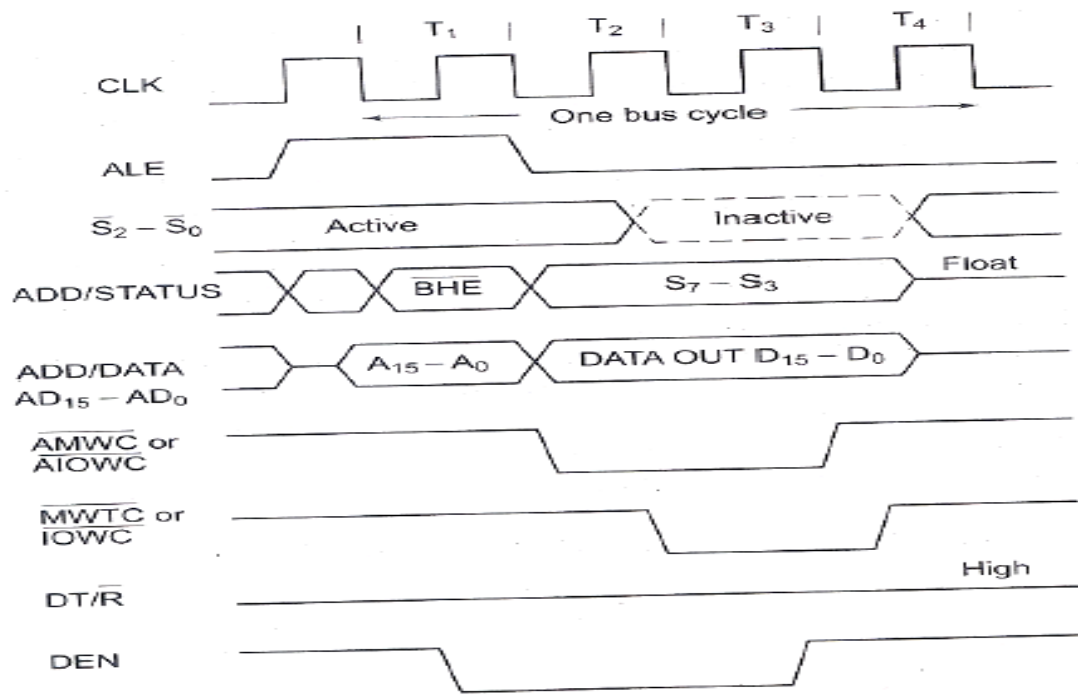


Fig. 1.3 Memory Write Timing in Maximum Mode

UNIT -II

- Instruction Set and Assembly Language Programming of 8086
- Instruction formats, Addressing modes,
- Instruction Set
- Assembler Directives,
- Procedures, Macros
- Simple Programs involving Logical
- Branch and Call Instructions
- Sorting Evaluating Arithmetic Expressions
- String Manipulations

UNIT-II

The instruction format contains two fields

- operation code / opcode
- Operand field

OPERATION CODE / OPCODE:

- It indicates the type of the operation to be performed by CPU
- Example : MOV , ADD ...

OPERAND:

- The CPU executes the instruction using the information resides in these fields .

There are six general formats of instructions in 8086 instruction set.


The instruction of 8086 vary from 1 to 6 bytes length

ONE BYTE INSTRUCTION:

- It is only one byte long and may have implied data or register operands.
- The least three significant 3 bits of the opcode are used for specifying register operand if any otherwise all the 8 bits form an opcode and the operands are implied.


REGISTER TO REGISTER

- The format is 2 byte long
- The first byte of the code specifies the opcode and width
- The second byte of the code shows the register operand and R/M field
- The Register represented by REG is one of the operands . The R/M field specifies another register or memory location .ie the other operand




REGISTER TO/FROM MEMORY WITH NO DISPLACEMENT

- The format is 2 byte long
- This is similar to the register to register format except for the MOD field is shown.
- The MOD field shows the mode of addressing




REGISTER TO/FROM MEMORY WITH DISPLACEMENT

- The format contains one or two additional bytes for displacement along with 2 bytes Register to/from memory with no displacement.




IMMEDIATE OPERAND TO REGISTER

- The first byte as well as the 3 bits from the second byte which are used for REG field in case of Register to register format or used for OPCODE.
- It also contains one or two bytes of data.

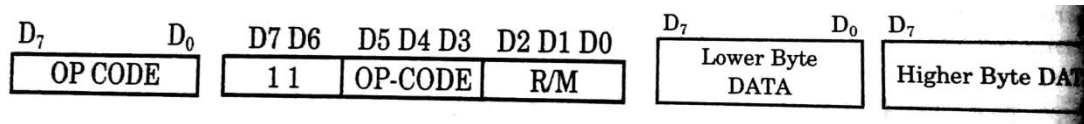

IMMEDIATE OPERAND TO MEMORY WITH 16 BIT DISPLACEMENTS

- It requires 5 to 6 bytes for coding
- The first two bytes contains the information regarding OPCODE,MOD and R/M fields
- The remaining 4 bytes contains 2 bytes of displacement and 2 bytes of data

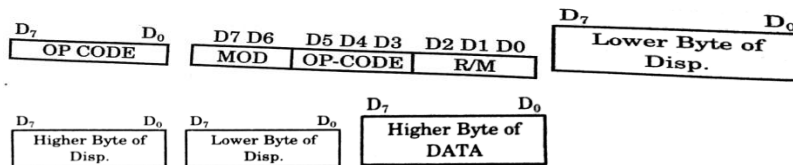

The 8086 instruction sizes vary from one to six bytes. Depending on the type of coding, an instruction may have more than one Hexcode, (not unique as in 8085)

The OP code field occupies 6-bits. It defines the operation to be carried out by the instruction.

Register Direct bit (D) occupies one bit. It defines whether the register operand in byte 2 is the source or destination operand.

D=1 Specifies that the register operand is the destination operand.


D=0 indicates that the register is a source operand.

Data size bit (W) defines whether the operation to be performed is an 8 bit or 16 bit data

W=0 indicates 8 bit operation

W=1 indicates 16 bit operation

W=0 indicates 8 bit operation
W=1 indicates 16 bit operation

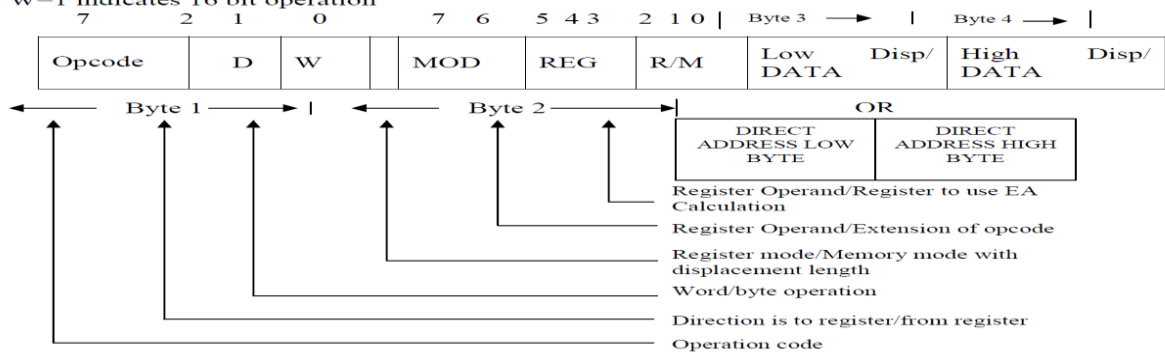

This byte contains 3 fields. These are the mode (MOD) field, the register (REG) field and the Register/Memory (R/M) field.

MOD (2 bits)	Interpretation
00	Memory mode with no displacement follows except for 16 bit displacement when R/M=110
01	Memory mode with 8 bit displacement
10	Memory mode with 16 bit displacement
11	Register mode (no displacement)

Register field occupies 3 bits. It defines the register for the first operand which is specified as source or destination by the D bit.

REG	W=0	W=1
000	AL	AX
001	CL	CX
010	DL	DX
011	BL	BX
100	AH	SP
101	CH	BP
110	DH	SI
111	BH	DI

The R/M field occupies 3 bits. The R/M field along with the MOD field defines the second operand as shown below.

MOD 11

R/M	W=0	W=1
000	AL	AX
001	CL	CX
010	DL	DX
011	BL	BX
100	AH	SP
101	CH	BP
110	DH	SI
111	BH	DI

Effective Address Calculation

R/M	MOD=00	MOD 01	MOD 10
000	$(BX) + (SI)$	$(BX) + (SI) + D8$	$(BX) + (SI) + D16$
001	$(BX) + (DI)$	$(BX) + (DI) + D8$	$(BX) + (DI) + D16$
010	$(BP) + (SI)$	$(BP) + (SI) + D8$	$(BP) + (SI) + D16$
011	$(BP) + (DI)$	$(BP) + (DI) + D8$	$(BP) + (DI) + D10$
100	(SI)	$(SI) + D8$	$(SI) + D16$
101	(DI)	$(DI) + D8$	$(DI) + D16$
110	Direct address	$(BP) + D8$	$(BP) + D16$
111	(BX)	$(BX) + D8$	$(BX) + D16$

In the above, encoding of the R/M field depends on how the mode field is set. If MOD=11 (register to register mode), this R/M identifies the second register operand.

MOD / R/M	Memory Mode (EA Calculation)			Register Mode	
	00	01	10	W=0	W=1
000	$(BX) + (SI)$	$(BX) + (SI) + d8$	$(BX) + (SI) + d16$	AL	AX
001	$(BX) + (DI)$	$(BX) + (DI) + d8$	$(BX) + (DI) + d16$	CL	CX
010	$(BP) + (SI)$	$(BP) + (SI) + d8$	$(BP) + (SI) + d16$	DL	DX
011	$(BP) + (DI)$	$(BP) + (DI) + d8$	$(BP) + (DI) + d16$	BL	BX
100	(SI)	$(SI) + d8$	$(SI) + d16$	AH	SP
101	(DI)	$(DI) + d8$	$(DI) + d16$	CH	BP
110	d16	$(BP) + d8$	$(BP) + d16$	DH	SI
111	(BX)	$(BX) + d8$	$(BX) + d16$	BH	DI

MOD selects memory mode, then R/M indicates how the effective address of the memory operand is to be calculated. Bytes 3 through 6 of an instruction are optional fields that

segment override prefix byte (SOP byte) to start with. The SOP byte is **001 xx 110**, where SR value is provided as per table shown below.

xx	Segment register
00	ES
01	CS
10	SS
11	DS

To specify DS register, the SOP byte would be 001 11 110 = 3E H. Thus the 5 byte code for this instruction would be 3E 89 96 45 23 H.

SOP	Opcode	D	W	MOD	REG	R/M	LB disp.	HD disp.
3EH	1000 10	0	1	10	010	110	45	23

Suppose we want to code MOV SS : 2345 (BP), DX. This generates only a 4 byte code, without SOP byte, as SS is already the default segment register in this case.

Example 5:

Give the instruction template and generate code for the instruction ADD 0FABE [BX], [DI], DX (code for ADD instruction is 000000)

ADD 0FABE [BX] [DI], DX

Here we have to specify DX using REG field. The bit D is 0, indicating that DX is the source register. The REG field must be 010 to indicate DX register. The w must be 1 to indicate it is a word operation. FABE (BX + DI) is specified using MOD value of 10 and R/M value of 001 (from the summary table). The 4 byte code for this instruction would be

Opcode	D	W	MOD	REG	R/M	16 bit disp.	
000000	0	1	10	010	001	BEH FAH	=01 91 BE FAH

Example 6 :

Give the instruction template and generate the code for the instruction MOV AX, [BX]

(Code for MOV instruction is 100010)

AX destination register with D=1 and code for AX is 000 [BX] is specified using 00 Mode and R/M value 111. It is a word operation

Opcode	D	W	Mod	REG	R/M	
100010	1	1	00	000	111	=8B 07H

INPUT/OUTPUT INSTRUCTIONS:

IN acc, port : In transfers a byte or a word from input port to the AL register or the AX register respectively. The port number may be specified either with an immediate byte constant, allowing access to ports numbered 0 through 255 or with a number previously placed in the DX register allowing variable access (by changing the value in DX) to ports numbered from 0 through 65,535.

In Operands	Example
acc, immB	IN AL, 0E2H (OR) IN AX, PORT
acc, DX	IN AX, DX (OR) IN AL, DX

ADDRESSING MODES OF 8086

According to the flow of instructions may be categorized as

1. Sequential Control flow instructions
2. Control transfer instructions

Sequential control flow instructions are the instructions which after execution transfer control to the next instruction appearing immediately. The control transfer instructions transfer control to some predefined address or the address somehow specified in the instruction after their execution.

What is addressing mode?

The different ways in which a source operand is denoted in an instruction are known as addressing mode the addressing modes for sequential control flow instructions are

1. Immediate Addressing Mode
2. Direct Addressing mode
3. Register Addressing mode
4. Register Indirect Addressing mode
5. Indexed Addressing Mode
6. Register Relative addressing mode
7. Based indexed addressing mode
8. Relative based indexed Addressing mode

IMMEDIATE ADDRESSING MODE

The addressing mode in which the data operand is a part of the instruction itself is known as immediate addressing mode.

Example

MOV DL, 08H

The 8-bit data (08_H) given in the instruction is moved to DL
(DL) ← 08_H

MOV AX, 0A9FH

The 16-bit data (0A9FH) given in the instruction is moved to AX register
(AX) ← 0A9FH

DIRECT ADDRESSING MODE

The addressing mode in which the effective address of the memory location at which the data operand is stored is given in the instruction. The effective address (Offset) is just a 16-bit number written directly in the instruction.

Example: MOV BX, [1354H]

MOV BL, [0400H]

The square brackets around the 1354H denote the contents of the memory location. When executed, this instruction will copy the contents of the memory location into BX register. This addressing mode is called direct because the displacement of the operand from the segment base is specified directly in the instruction.

REGISTER ADDRESSING MODE

The instruction will specify the name of the register which holds the data to be operated by the instruction. All registers except IP may be used in this mode

Example:

MOV CL, DH

The content of 8-bit register DH is moved to another 8-bit register CL
(CL) $\leftarrow$ (DH)

REGISTER INDIRECT ADDRESSING MODE

This addressing mode allows data to be addressed at any memory location through an offset address held in any of the following registers: BP, BX, DI & SI.

Example

MOV AX, [BX]; suppose the register BX contains 4895H, then the contents
; 4895H are moved to AX

ADD CX, {BX}

INDEXED ADDRESSING MODE

In this addressing mode, the operands offset address is found by adding the contents of SI or DI register and 8-bit/16-bit displacements. DS and ES are the default segments for index registers SI and DI respectively. This is the special case of the of register indirect addressing mode.

Example

MOV BX, [SI+16], ADD AL, [DI+16]

REGISTER RELATIVE ADDRESSING MODE

In register relative Addressing, BX, BP, SI and DI is used to hold the base value for effective address and a signed 8-bit or unsigned 16-bit displacement will be specified in the instruction. In case of 8-bit displacement, it is sign extended to 16-bit before adding to the base value. When BX holds the base value of EA, 20-bit physical address is calculated from BX and DS. When BP holds the base value of EA, BP and SS is used.

Example:

MOV AX, [BX + 08H] MOV AX, 08H [BX]

BASED INDEXED ADDRESSING MODE

In this addressing mode, the offset address of the operand is computed by summing the base register to the contents of an Index register. The default segment registers may be ES or DS

Example:

MOV DX, [BX + SI] MOV DX, [BX][SI]

RELATIVE BASED INDEXED ADDRESSING MODE

In this addressing mode, the operands offset is computed by adding the base register contents. An Index registers contents and 8 or 16-bit displacement.

Example

MOV AX, [BX+DI+08]

ADD CX, [BX+SI+16]

CONTROL TRANSFER INSTRUCTIONS ADDRESSING MODES /BRANCH ADDRESSING MODE

The control transfer instructions transfer control to some predefined address or the address somehow specified in the instruction after their execution

Examples : INT , CALL ,RET and JUMP instructions

The control transfer instruction the addressing modes depend upon whether destination location is within the same segment or a different one .It also depends on the method of passing the destination address to the processor

Basically there are two methods for passing control transfer instructions

1. Intersegment addressing mode
2. Intrasegment addressing mode

INTRASEGMENT ADDRESSING MODE

If the destination location is within the same segment the mode is called intrasegment addressing mode

There are two types

1. Intrasegment direct mode
2. Intrasegment indirect mode

INTRASEGMENT DIRECT MODE:

In this mode the address to which the control is to be transferred lies within the segment in which the control transfer instruction lies and appears directly in the instruction as an immediate displacement value .The displacement is computed relative to the content of the instruction pointer IP.

JMP SHORT LABEL;

is a control transfer instruction following intra segment direct mode. Here, SHORT LABEL represents a signed displacement.

INTRASEGMENT INDIRECT MODE :

In this mode the displacement to which the control is to be transferred is in the same segment in which the control transfer instruction lies but it is passed to the instruction indirectly Here the branch address is found as the content of a register or a memory location .

Example

JMP [AX]

INTERSEGMENT ADDRESSING MODE

If the destination location is in the different segment the mode is called intersegment addressing mode

There are two types

1. Intersegment direct mode
2. Intersegment indirect mode

INTERSEGMENT DIRECT MODE:

In this mode the address to which the control is to be transferred is in a different segment this addressing mode provides a means of branching from one code segment to another code segment. Here the CS and IP of the destination address are specified directly in the instruction.

Example

JMP 2000H: 3000H;

INTERSEGMENT INDIRECT MODE :

In this the address to which the control is to be transferred lies in a different segment and it is passed to the instruction indirectly .Content of memory block containing four bytes IP(LSB) ,IP(MSB),CS(LSB) and CS(MSB) sequentially The starting address of the memory block may be referred using any of the addressing mode except immediate mode .

Example

JMP [5000H];

INSTRUCTION SET OF 8086

The 8086 microprocessor supports 8 types of instructions –

- Data Transfer Instructions
- Arithmetic Instructions
- logical Instructions
- String Instructions
- Program Execution Transfer Instructions (Branch & Loop Instructions)
- Processor Control Instructions
- Iteration Control Instructions
- Interrupt Instructions

1. DATA TRANSFER INSTRUCTIONS

These instructions are used to transfer the data from the source operand to the destination operand. Following are the list of instructions under this group –

INSTRUCTION TO TRANSFER A WORD

- **MOV** – Used to copy the byte or word from the provided source to the provided destination.
- **PPUSH** – Used to put a word at the top of the stack.
- **POP** – Used to get a word from the top of the stack to the provided location.
- **PUSHA** – Used to put all the registers into the stack.
- **POPA** – Used to get words from the stack to all registers.

- **XCHG** – Used to exchange the data from two locations.
- **XLAT** – Used to translate a byte in AL using a table in the memory.

INSTRUCTIONS FOR INPUT AND OUTPUT PORT TRANSFER

- **IN** – Used to read a byte or word from the provided port to the accumulator.
- **OUT** – Used to send out a byte or word from the accumulator to the provided port.

INSTRUCTIONS TO TRANSFER THE ADDRESS

- **LEA** – Used to load the address of operand into the provided register.
- **LDS** – Used to load DS register and other provided register from the memory
- **LES** – Used to load ES register and other provided register from the memory.

INSTRUCTIONS TO TRANSFER FLAG REGISTERS

- **LAHF** – Used to load AH with the low byte of the flag register.
- **SAHF** – Used to store AH register to low byte of the flag register.
- **PUSHF** – Used to copy the flag register at the top of the stack.
- **POPF** – Used to copy a word at the top of the stack to the flag register.

2. ARITHMETIC INSTRUCTIONS

These instructions are used to perform arithmetic operations like addition, subtraction, multiplication, division, etc.

Following is the list of instructions under this group –

INSTRUCTIONS TO PERFORM ADDITION

- **ADD** – Used to add the provided byte to byte/word to word.
- **ADC** – Used to add with carry.
- **INC** – Used to increment the provided byte/word by 1.
- **AAA** – Used to adjust ASCII after addition.
- **DAA** – Used to adjust the decimal after the addition/subtraction operation.

INSTRUCTIONS TO PERFORM SUBTRACTION

- **SUB** – Used to subtract the byte from byte/word from word.
- **SBB** – Used to perform subtraction with borrow.
- **DEC** – Used to decrement the provided byte/word by 1.
- **NPG** – Used to negate each bit of the provided byte/word and add 1/2's complement.
- **CMP** – Used to compare 2 provided byte/word.
- **AAS** – Used to adjust ASCII codes after subtraction.
- **DAS** – Used to adjust decimal after subtraction.

INSTRUCTION TO PERFORM MULTIPLICATION

- **MUL** – Used to multiply unsigned byte by byte/word by word.
- **IMUL** – Used to multiply signed byte by byte/word by word.
- **AAM** – Used to adjust ASCII codes after multiplication.

INSTRUCTIONS TO PERFORM DIVISION

- **DIV** – Used to divide the unsigned word by byte or unsigned double word by word.
- **IDIV** – Used to divide the signed word by byte or signed double word by word.
- **AAD** – Used to adjust ASCII codes after division.
- **CBW** – Used to fill the upper byte of the word with the copies of sign bit of the lower byte.
- **CWD** – Used to fill the upper word of the double word with the sign bit of the lower word.

3. LOGICAL INSTRUCTIONS

These instructions are used to perform operations where data bits are involved, i.e. operations like logical, shift, etc.

Following is the list of instructions under this group –

INSTRUCTIONS TO PERFORM LOGICAL OPERATION

- **NOT** – Used to invert each bit of a byte or word.
- **AND** – Used for adding each bit in a byte/word with the corresponding bit in another byte/word.
- **OR** – Used to multiply each bit in a byte/word with the corresponding bit in another byte/word.
- **XOR** – Used to perform Exclusive-OR operation over each bit in a byte/word with the corresponding bit in another byte/word.
- **TEST** – Used to add operands to update flags, without affecting operands.

INSTRUCTIONS TO PERFORM SHIFT OPERATIONS

- **SHL/SAL** – Used to shift bits of a byte/word towards left and put zero(S) in LSBs.
- **SHR** – Used to shift bits of a byte/word towards the right and put zero(S) in MSBs.
- **SAR** – Used to shift bits of a byte/word towards the right and copy the old MSB into the new MSB.

INSTRUCTIONS TO PERFORM ROTATE OPERATIONS

- **ROL** – Used to rotate bits of byte/word towards the left, i.e. MSB to LSB and to Carry Flag [CF].
- **ROR** – Used to rotate bits of byte/word towards the right, i.e. LSB to MSB and to Carry Flag [CF].

- **RCR** – Used to rotate bits of byte/word towards the right, i.e. LSB to CF and CF to MSB.
- **RCL** – Used to rotate bits of byte/word towards the left, i.e. MSB to CF and CF to LSB.

4. STRING INSTRUCTIONS

String is a group of bytes/words and their memory is always allocated in a sequential order.

Following is the list of instructions under this group –

- **REP** – Used to repeat the given instruction till $CX \neq 0$.
- **REPE/REPZ** – Used to repeat the given instruction until $CX = 0$ or zero flag $ZF = 1$.
- **REPNE/REPNZ** – Used to repeat the given instruction until $CX = 0$ or zero flag $ZF \neq 1$.
- **MOVS/MOVSb/MOVSsw** – Used to move the byte/word from one string to another.
- **COMS/COMPSb/COMPSsw** – Used to compare two string bytes/words.
- **INS/INSb/INSsw** – Used as an input string/byte/word from the I/O port to the provided memory location.
- **OUTS/OUTSb/OUTSsw** – Used as an output string/byte/word from the provided memory location to the I/O port.
- **SCAS/SCASb/SCASsw** – Used to scan a string and compare its byte with a byte in AL or string word with a word in AX.
- **LODS/LODSb/LODSsw** – Used to store the string byte into AL or string word into AX.

5. PROGRAM EXECUTION TRANSFER INSTRUCTIONS (BRANCH AND LOOP INSTRUCTIONS)

These instructions are used to transfer/branch the instructions during an execution. It includes the following instructions –

Instructions to transfer the instruction during an execution without any condition –

- **CALL** – Used to call a procedure and save their return address to the stack.
- **RET** – Used to return from the procedure to the main program.
- **JMP** – Used to jump to the provided address to proceed to the next instruction.

Instructions to transfer the instruction during an execution with some conditions –

- **JA/JNBE** – Used to jump if above/not below/equal instruction satisfies.
- **JAE/JNB** – Used to jump if above/not below instruction satisfies.
- **JBE/JNA** – Used to jump if below/equal/ not above instruction satisfies.
- **JC** – Used to jump if carry flag $CF = 1$
- **JE/JZ** – Used to jump if equal/zero flag $ZF = 1$
- **JG/JNLE** – Used to jump if greater/not less than/equal instruction satisfies.

- **JGE/JNL** – Used to jump if greater than/equal/not less than instruction satisfies.
- **JL/JNGE** – Used to jump if less than/not greater than/equal instruction satisfies.
- **JLE/JNG** – Used to jump if less than/equal/if not greater than instruction satisfies.
- **JNC** – Used to jump if no carry flag (CF = 0)
- **JNE/JNZ** – Used to jump if not equal/zero flag ZF = 0
- **JNO** – Used to jump if no overflow flag OF = 0
- **JNP/JPO** – Used to jump if not parity/parity odd PF = 0
- **JNS** – Used to jump if not sign SF = 0
- **JO** – Used to jump if overflow flag OF = 1
- **JP/JPE** – Used to jump if parity/parity even PF = 1
- **JS** – Used to jump if sign flag SF = 1

6. PROCESSOR CONTROL INSTRUCTIONS

These instructions are used to control the processor action by setting/resetting the flag values.

Following are the instructions under this group –

- **STC** – Used to set carry flag CF to 1
- **CLC** – Used to clear/reset carry flag CF to 0
- **CMC** – Used to put complement at the state of carry flag CF.
- **STD** – Used to set the direction flag DF to 1
- **CLD** – Used to clear/reset the direction flag DF to 0
- **STI** – Used to set the interrupt enable flag to 1, i.e., enable INTR input.
- **CLI** – Used to clear the interrupt enable flag to 0, i.e., disable INTR input.

7. ITERATION CONTROL INSTRUCTIONS

These instructions are used to execute the given instructions for number of times. Following is the list of instructions under this group –

- **LOOP** – Used to loop a group of instructions until the condition satisfies, i.e., CX = 0
- **LOOPE/LOOPZ** – Used to loop a group of instructions till it satisfies ZF = 1 & CX = 0
- **LOOPNE/LOOPNZ** – Used to loop a group of instructions till it satisfies ZF = 0 & CX = 0
- **JCXZ** – Used to jump to the provided address if CX = 0

8. INTERRUPT INSTRUCTIONS

These instructions are used to call the interrupt during program execution.

- **INT** – Used to interrupt the program during execution and calling service specified.
- **INTO** – Used to interrupt the program during execution if OF = 1
- **IRET** – Used to return from interrupt service to the main program

ASSEMBLER DIRECTIVES

Assembler directives are the Instructions to the Assembler, linker and loader regarding the program being executed. also called 'pseudo instructions. Control the generation of machine codes and organization of the program; but no machine codes are generated for assembler directives.

They are used to

- › specify the start and end of a program
- › attach value to variables
- › allocate storage locations to input/ output data
- › define start and end of segments, procedures, macros etc..

ASSUME

Used to tell the assembler the name of the logical segment it should use for a specified segment. You must tell the assembler that what to assume for any segment you use in the program.

Example

ASSUME: CODE

Tells the assembler that the instructions for the program are in segment named CODE.

DB – Defined Byte

Used to declare a byte type variable or to set aside one or more locations of type byte in memory.

Example

PRICES DB 49H, 98H, 29H:

Declare array of 3 bytes named PRICES and initialize 3 bytes as shown.

DD – Define Double Word

Used to declare a variable of type doubleword or to reserve a memory location which can be accessed as doubleword.

DQ – Define Quadword

Used to tell the assembler to declare the variable as 4 words of storage in memory.

DT – Define Ten Bytes

Used to tell the assembler to declare the variable which is 10 bytes in length or reserve 10 bytes of storage in memory.

DW – Define Word

Used to tell the assembler to define a variable type as word or reserve word in memory.

DUP: used to initialize several locations and to assign values to location

END – End the Program

To tell the assembler to stop fetching the instruction and end the program execution.

ENDP – it is used to end the procedure.

ENDS – used to end the segment.

EQU – EQUATE

Used to give name to some value or symbol.

EVEN – Align On Even Memory Address

Tells the assembler to increment the location counter to the next even address if it is not already at an even address.

EXTRN

Used to tell the assembler that the name or labels following the directive are in some other assembly module.

GLOBAL – Declares Symbols As Public Or Extern

Used to make the symbol available to other modules. It can be used in place of EXTRN or PUBLIC keyword.

GROUP – Group related segment

Used to tell the assembler to group the logical segments named after the directive into one logical segment. This allows the content of all the segments to be accessed from the same group.

INCLUDE – include source code from file

Used to tell the assembler to insert a block of source code from the named file into the current source module. This shortens the source code.

LABEL

Used to give the name to the current value in the location counter. The LABEL directive must be followed by a term which specifies the type you want associated with that name.

LENGTH

Used to determine the number of items in some data such as string or array.

NAME

Used to give a specific name to a module when the programs consisting of several modules.

OFFSET

It is an operator which tells the assembler to determine the offset or displacement of named data item or procedure from the start of the segment which contains it.

ORG – Originate

Tells the assembler to set the location counter value.

Example, ORG 7000H sets the location counter value to point to 7000H location in memory.

\$ is often used to symbolically represent the value of the location counter. It is used with ORG to tell the assembler to change the location according to the current value in the location counter. E.g. ORG \$+100.

UNIT -III

I/O Interface

- 8255 PPI
- Various Modes of Operation and Interfacing to 8086
- D/A and A/D Converter
- Stepper motor
- Interfacing of DMA controller 8257

Interfacing with advanced devices

- Memory Interfacing to 8086
- Interrupt Structure of 8086
- Interrupt Vector Table, Interrupt Service Routine
- architecture of 8259.

Communication Interface

- Serial Communication Standards
- Serial Data Transfer Schemes
- 8251 USART Architecture and Interfacing.

UNIT-3

I/O Interface

Introduction:

Any application of a microprocessor based system requires the transfer of data between external circuitry to the microprocessor and microprocessor to the external circuitry. User can give information to the microprocessor based system using keyboard and user can see the result or output information from the microprocessor based system with the help of display device. The transfer of data between keyboard and microprocessor, and microprocessor and display device is called input/output data transfer or I/O data transfer. This data transfer is done with the help of I/O ports.

Input port:

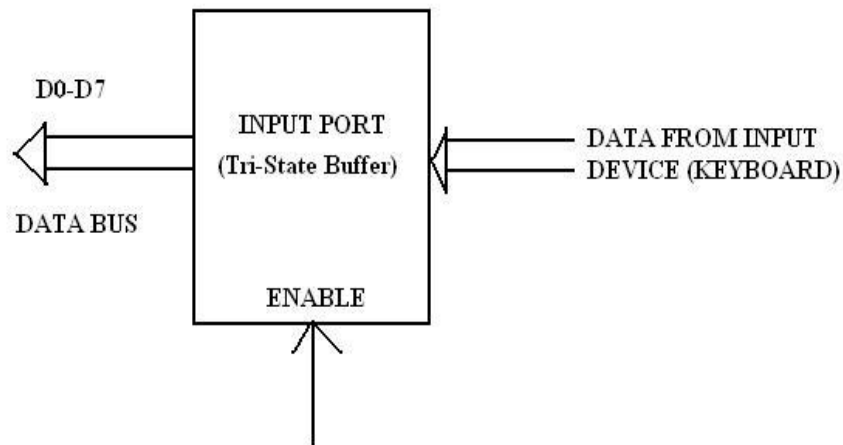


FIG.1 INPUT PORT

It is used to read data from the input device such as keyboard. The simplest form of input port is a buffer. The input device is connected to the microprocessor through buffer, as shown in the fig.1. This buffer is a tri-state buffer and its output is available only when enable signal is active. When microprocessor wants to read data from the input device (keyboard), the control signals from the microprocessor activates the buffer by asserting enable input of the buffer. Once the buffer is enabled, data from the input device is available on the data bus. Microprocessor reads this data by initiating read command.

Output port:

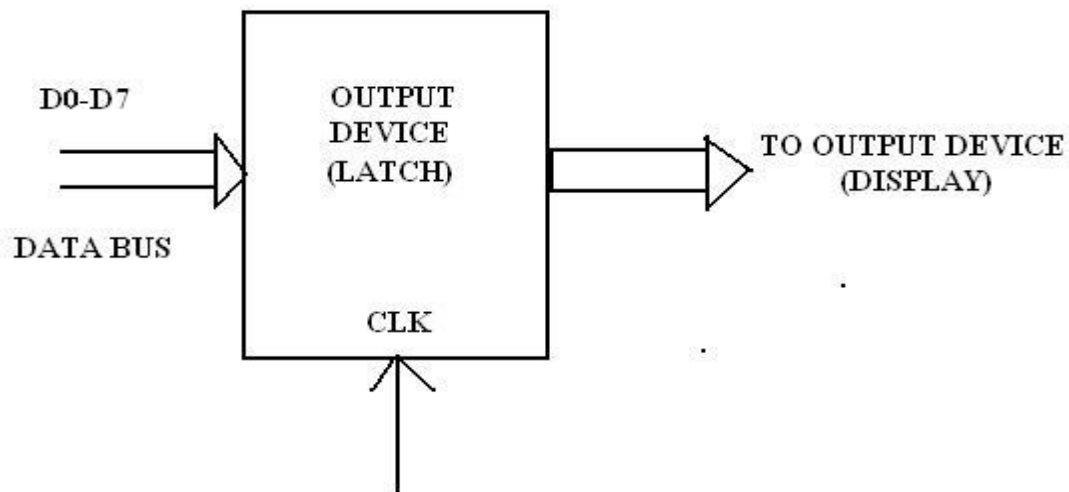


FIG.2 OUTPUT PORT

It is used to send data to the output device such as display from the microprocessor. The simplest form of output port is a latch. The output device is connected to the microprocessor through latch, as shown in the fig.2. When microprocessor wants to send data to the output device it puts the data on the data bus and activates the clock signal of the latch, latching the data from the data bus at the output of latch. It is then available at the output of latch for the output device.

Serial and Parallel Transmission:

In telecommunications, serial transmission is the sequential transmission of signal elements of a group representing a character or other entity of data. Digital serial transmissions are bits sent over a single wire, frequency or optical path sequentially. Because it requires less signal processing and less chance for error than parallel transmission, the transfer rate of each individual path may be faster. This can be used over longer distances as a check digit or parity bit can be sent along it easily.

In telecommunications, parallel transmission is the simultaneous transmission of the signal elements of a character or other entity of data. In digital communications, parallel transmission is the simultaneous transmission of related signal elements over two or more separate paths. Multiple electrical wires are used which can transmit multiple bits simultaneously, which allows for higher data transfer rates than can be achieved with serial transmission. This method is used internally within the computer, for example the internal buses, and sometimes externally for such things as printers, The major issue with this is "skewing" because the wires in parallel data transmission have slightly different properties (not intentionally) so some bits may arrive before others, which may corrupt

the message. A parity bit can help to reduce this. However, electrical wire parallel data transmission is therefore less reliable for long distances because corrupt transmissions are far more likely.

Interrupt driven I/O:

In this technique, a CPU automatically executes one of a collection of special routines whenever certain condition exists within a program or a processor system. Example CPU gives response to devices such as keyboard, sensor and other components when they request for service. When the CPU is asked to communicate with devices, it services the devices. Example each time you type a character on a keyboard, a keyboard service routine is called. It transfers the character you typed from the keyboard I/O port into the processor and then to a data buffer in memory.

The interrupt driven I/O technique allows the CPU to execute its main program and only stop to service I/O device when it is told to do so by the I/O system as shown in fig.3. This method provides an external asynchronous input that would inform the processor that it should complete whatever instruction that is currently being executed and fetch a new routine that will service the requesting device. Once this servicing is completed, the processor would resume exactly where it left off.

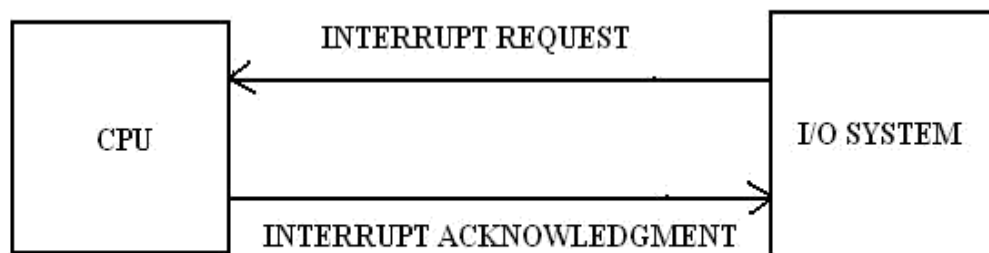


FIG.3 INTERRUPT DRIVEN I/O

An analogy to the interrupt concept is in the classroom, where the professor serves as CPU and the students as I/O ports. The classroom scenario for this interrupt analogy will be such that the professor is busy in writing on the blackboard and delivering his lecture.

The student raises his finger when he wants to ask a question (student requesting for service). The professor then completes his sentence and acknowledges student's request by saying "YES" (professor acknowledges the interrupt request). After acknowledgement from the professor, student asks the question and professor gives answer to the question (professor services the interrupt). After that professor continues its remaining lecture from where it was left.

PIO 8255:

The parallel input-output port chip 8255 is also called as programmable **peripheral input-output port**. The Intel's 8255 are designed for use with Intel's 8-bit, 16-bit and higher capability microprocessors. It has 24 input/output lines which may be individually programmed in two groups of twelve lines each, or three groups of eight lines.

The two groups of I/O pins are named as Group A and Group B. Each of these two groups contains a subgroup of eight I/O lines called as 8-bit port and another subgroup of four lines or a 4-bit port. Thus Group A contains an 8-bit port A along with a 4-bit port C upper.


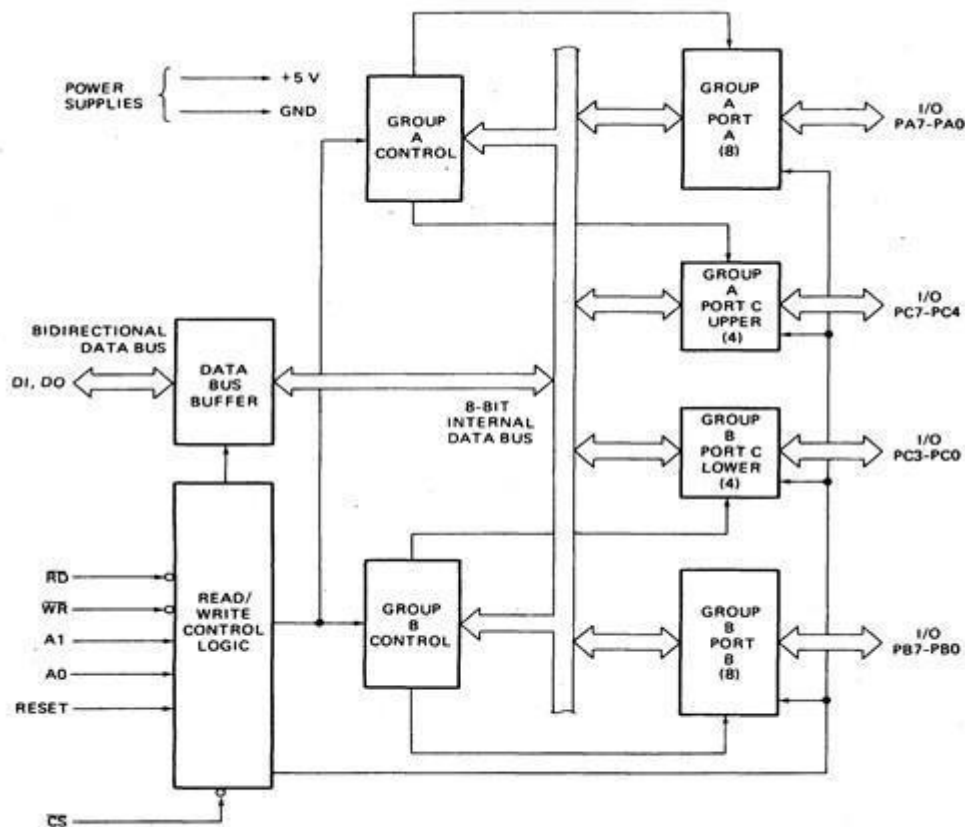


FIGURE Internal block diagram of 8255A programmable parallel port device. (Intel Corporation)

The port A lines are identified by symbols PA0-PA7 while the port C lines are identified as PC4-PC7 similarly. Group B contains an 8-bit port B, containing lines PB0-PB7 and a 4-bit port C with lower bits PC0-PC3. The port C upper and port C lower can be used in combination as an 8-bit port C. Both the port Cs is assigned the same address. Thus one may have either three 8-bit I/O ports or two 8-bit and two 4-bit I/O ports from 8255. All of these ports can function independently either as input or as output ports. This can be achieved by programming the bits of an internal register of 8255 called as control word register (CWR). The internal block diagram and the pin configuration of 8255 are shown in figs.

The 8-bit data bus buffer is controlled by the read/write control logic. The read/write control logic manages all of the internal and external transfer of both data and control words. RD, WR, A1, A0 and RESET are the inputs, provided by the microprocessor to READ/WRITE control logic of 8255. The 8-bit, 3-state bidirectional buffer is used to interface the 8255 internal data bus with the external system data bus. This buffer receives or transmits data upon the execution of input or output instructions by the microprocessor. The control words or status information is also transferred through the buffer.

Pin Diagram of 8255A

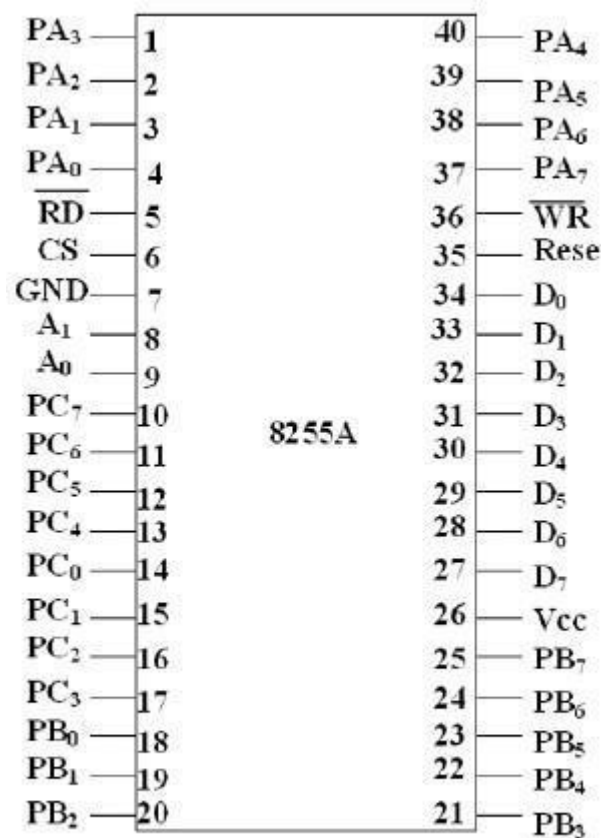

8255A Pin Configuration

The pin configuration of 8255 is shown in fig.

- ❑ The port A lines are identified by symbols PA0-PA7 while the port C lines are
- ❑ Identified as PC4-PC7. Similarly, Group B contains an 8-bit port B, containing lines PB0-PB7 and a 4-bit port C with lower bits PC0- PC3. The port C upper and port C lower can be used in combination as an 8-bit port C.
- ❑ Both the port C is assigned the same address. Thus one may have either three 8-bit I/O ports or two 8-bit and two 4-bit ports from 8255. All of these ports can function independently either as input or as output ports. This can be

achieved by programming the bits of an internal register of 8255 called as control word register (CWR).

The 8-bit data bus buffer is controlled by the read/write control logic. The read/write control logic manages all of the internal and external transfers of both data and control words.

RD, WR, A1, A0 and RESET are the inputs provided by the microprocessor to the READ/ WRITE control logic of 8255. The 8-bit, 3-state bidirectional buffer is used to interface the 8255 internal data bus with the external system data bus.

This buffer receives or transmits data upon the execution of input or output instructions by the microprocessor. The control words or status information is also transferred through the buffer.

The signal description of 8255 is briefly presented as follows:

PA7-PA0: These are eight port A lines that acts as either latched output or buffered input lines depending upon the control word loaded into the control word register.

PC7-PC4: Upper nibble of port C lines. They may act as either output latches or input buffers lines.

This port also can be used for generation of handshake lines in mode1 or mode2.

PC3-PC0: These are the lower port C lines; other details are the same as PC7-PC4 lines.

PB0-PB7: These are the eight port B lines which are used as latched output lines or buffered input lines in the same way as port A.

RD: This is the input line driven by the microprocessor and should be low to indicate read operation to 8255.

WR: This is an input line driven by the microprocessor. A low on this line indicates write operation.

CS: This is a chip select line. If this line goes low, it enables the 8255 to respond to RD and WR signals, otherwise RD and WR signal are neglected.

D0-D7: These are the data bus lines those carry data or control word to/from the microprocessor.

RESET: Logic high on this line clears the control word register of 8255. All ports are set as input ports by default after reset.

A1-A0: These are the address input lines and are driven by the microprocessor.

These lines A1-A0 with RD, WR and CS from the following operations for 8255. These address lines are used for addressing any one of the four registers, i.e. three ports and a control word register as given in table below.

In case of 8086 systems, if the 8255 is to be interfaced with lower order data bus, the A0 and A1 pins of 8255 are connected with A1 and A2 respectively.

$\overline{RD}$	$\overline{WR}$	$\overline{CS}$	A_1	A_0	Input (Read) cycle
0	1	0	0	0	Port A to Data bus
0	1	0	0	1	Port B to Data bus
0	1	0	1	0	Port C to Data bus
0	1	0	1	1	CWR to Data bus

$\overline{RD}$	$\overline{WR}$	$\overline{CS}$	A_1	A_0	Output (Write) cycle
1	0	0	0	0	Data bus to Port A
1	0	0	0	1	Data bus to Port B
1	0	0	1	0	Data bus to Port C
1	0	0	1	1	Data bus to CWR

$\overline{RD}$	$\overline{WR}$	$\overline{CS}$	A_1	A_0	Function
X	X	1	X	X	Data bus tristated
1	1	0	X	X	Data bus tristated

Control Word Register

Modes of Operation of 8255

These are two basic modes of operation of 8255. I/O mode and Bit Set-Reset mode (BSR).

In I/O mode, the 8255 ports work as programmable I/O ports, while in BSR mode only port C (PC0-PC7) can be used to set or reset its individual port bits.

Under the I/O mode of operation, further there are three modes of operation of 8255, so as to support different types of applications, mode 0, mode 1 and mode 2.


BSR Mode: In this mode any of the 8-bits of port C can be set or reset depending on D0 of the control word. The bit to be set or reset is selected by bit select flags D3, D2 and D1 of the CWR as given in table.

I/O Modes:

a) Mode 0 (Basic I/O mode): This mode is also called as basic input/output Mode. This mode provides simple input and output capabilities using each of the three ports. Data can be simply read from and written to the input and output ports respectively, after appropriate initialization.

D ₃	D ₂	D ₁	Selected bits of port C
0	0	0	D ₀
0	0	1	D ₁
0	1	0	D ₂
0	1	1	D ₃
1	0	0	D ₄
1	0	1	D ₅
1	1	0	D ₆
1	1	1	D ₇

BSR Mode : CWR Format

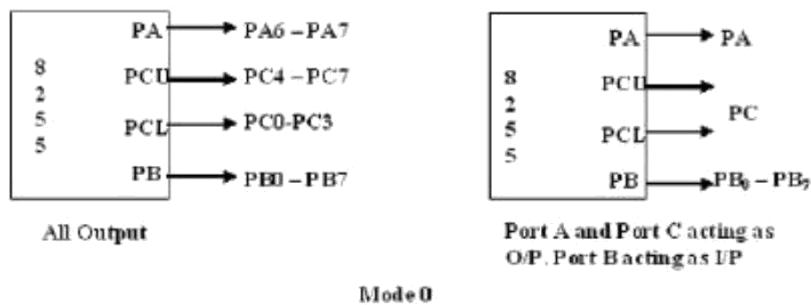


The salient features of this mode are as listed below:


1. Two 8-bit ports (port A and port B) and two 4-bit ports (port C upper and lower) are available. The two 4-bit ports can be combined used as a third 8-bit port.
2. Any port can be used as an input or output port.
3. Output ports are latched. Input ports are not latched.
4. A maximum of four ports are available so that overall 16 I/O configurations are possible.

All these modes can be selected by programming a register internal to 8255 known as CWR.


The control word register has two formats. The first format is valid for I/O modes of operation, i.e. modes 0, mode 1 and mode 2 while the second format is valid for bit set/reset (BSR) mode of operation.

These formats are shown in following fig.

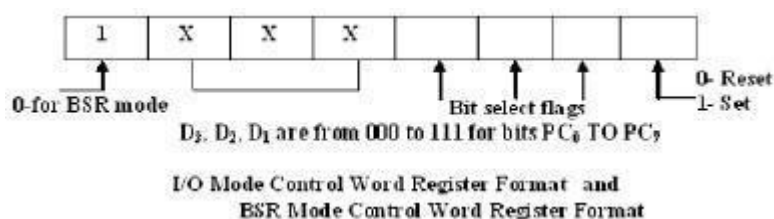

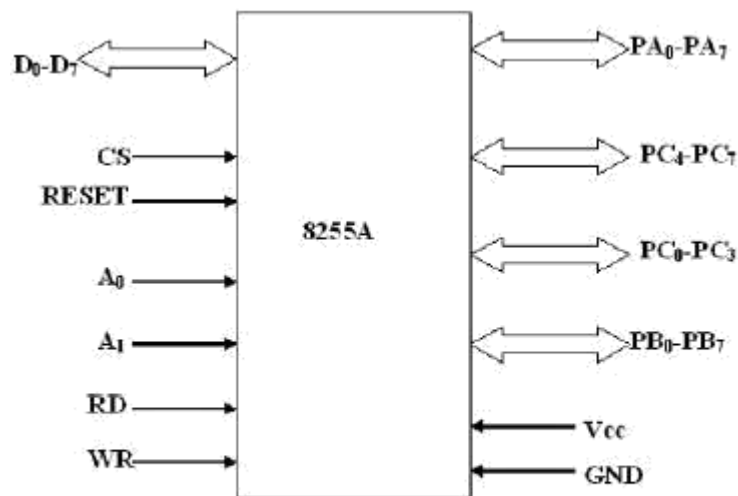

Signals of 8255

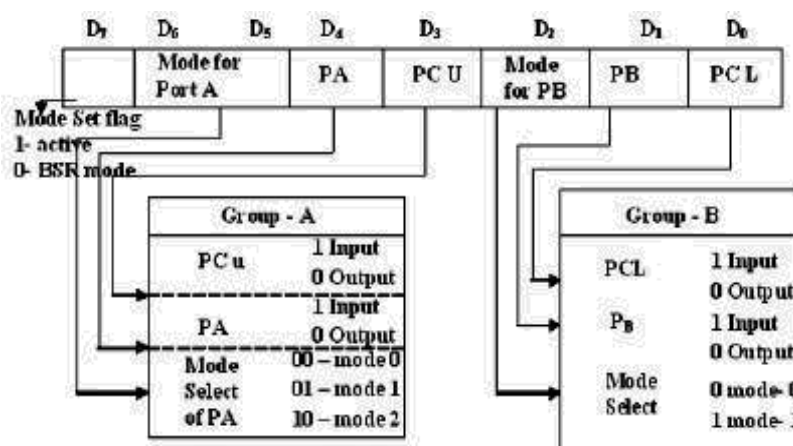

Control Word Format of 8255

b) Mode 1: (Strobed input/output mode) In this mode the handshaking control the input and output action of the specified port. Port C lines PC0-PC2, provide strobe or handshake lines for port B. This group which includes port B and PC0-PC2 is called as group B for Strobed data input/output. Port C lines PC3-PC5 provides strobe lines for port A. This group including port A and PC3-PC5 from group A. Thus port C is utilized for generating handshake signals.

The salient features of mode 1 are listed as follows:

1. Two groups – group A and group B are available for strobed data transfer.
2. Each group contains one 8-bit data I/O port and one 4-bit control/data port.
3. The 8-bit data port can be either used as input and output port. The inputs and outputs both are latched.
4. Out of 8-bit port C, PC0-PC2 are used to generate control signals for port B and PC3-PC5 are used to generate control signals for port A. the lines PC6, PC7 may be used as independent data lines.

The control signals for both the groups in input and output modes are explained as follows:



Input control signal definitions (mode 1):


- **STB** (Strobe input) – If this line falls to logic low level, the data available at 8-bit input port is loaded into input latches.
- **IBF** (Input buffer full) – If this signal rises to logic 1, it indicates that data has been loaded into latches, i.e. it works as an acknowledgement. IBF is set by a low on STB and is reset by the rising edge of RD input.
- **INTR** (Interrupt request) – This active high output signal can be used to interrupt the CPU whenever an input device requests the service. INTR is set by a high STB pin and a high at IBF pin. INTE is an internal flag that can be controlled by the bit set/reset mode of either PC4 (INTEA) or PC2 (INTEB) as shown in fig.
- INTR is reset by a falling edge of RD input. Thus an external input device can request the service of the processor by putting the data on the bus and sending the strobe signal.

Output control signal definitions (mode 1):



- **OBF** (Output buffer full) – This status signal, whenever falls to low, indicates that CPU has written data to the specified output port. The OBF flip-flop will be set by a rising edge of WR signal and reset by a low going edge at the ACK input.
- **ACK** (Acknowledge input) – ACK signal acts as an acknowledgement to be given by an output device. ACK signal, whenever low, informs the CPU that the data transferred by the CPU to the output device through the port is received by the output device.
- **INTR** (Interrupt request) – Thus an output signal that can be used to interrupt the CPU when an output device acknowledges the data received from the CPU. INTR is set when ACK, OBF and INTE are 1. It is reset by a

fallingedge on WRinput. The INTEA and INTEB flags are controlled by the bit set-reset mode of PC6 and PC2 respectively.

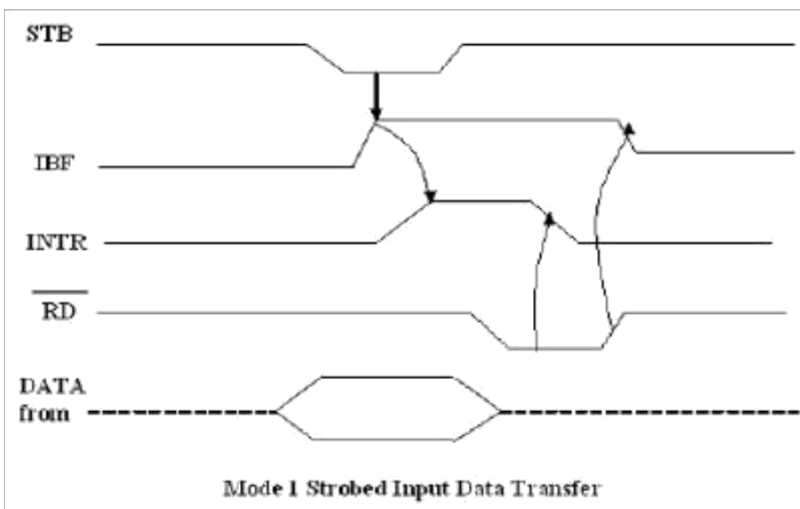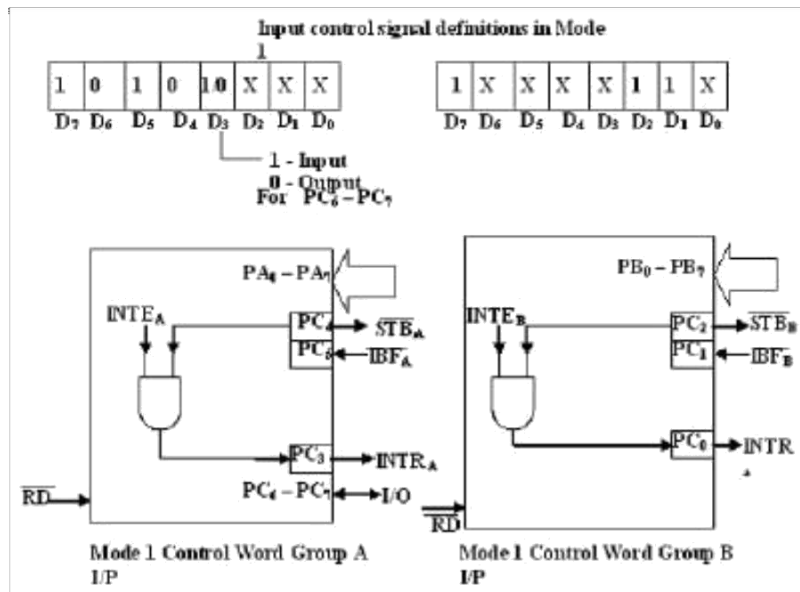

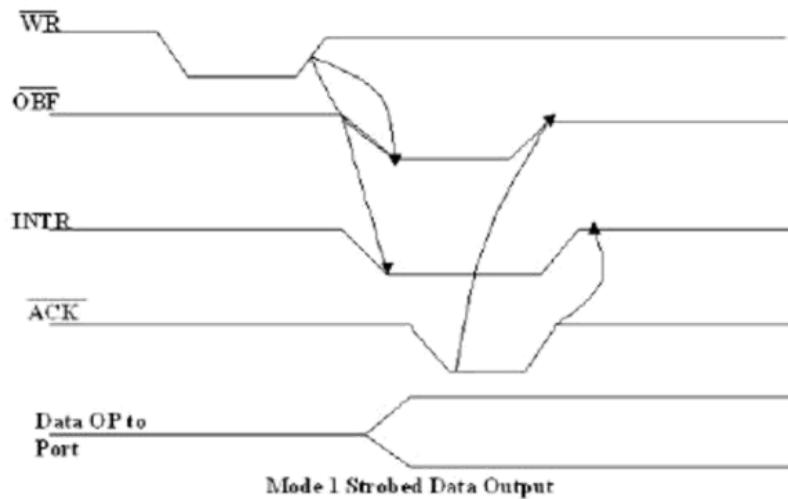

Output control signal definitions Mode 1

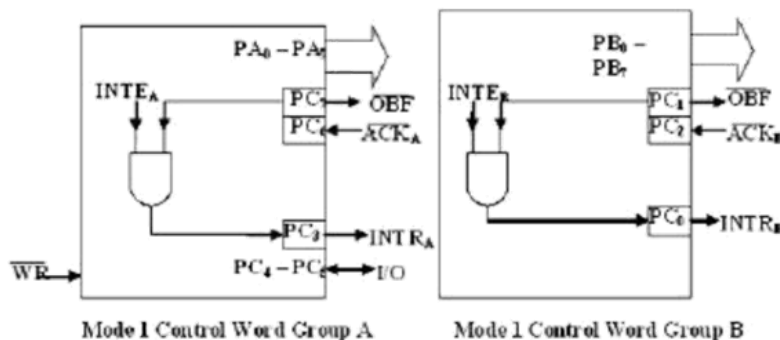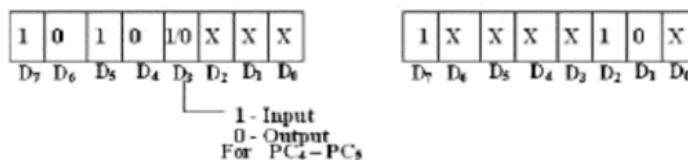

c) Mode 2 (Strobed bidirectional I/O): This mode of operation of 8255 is also called as strobed bidirectional I/O. This mode of operation provides 8255 with additional features for communicating with a peripheral device on an 8-bit databus. Handshaking signals are provided to maintain proper data flow and synchronization between the data transmitter and receiver. The interrupt generation and other functions are similar to mode 1.

In this mode, 8255 is a bidirectional 8-bit port with handshake signals. The R and WR signals decide whether the 8255 is going to operate as an input port or output port.

The Salient features of Mode 2 of 8255 are listed as follows:

1. The single 8-bit port in group A is available.
2. The 8-bit port is bidirectional and additionally a 5-bit control port is available.
3. Three I/O lines are available at port C. (PC₂ - PC₀)
4. Inputs and outputs are both latched.


5. The 5-bit control port C (PC3-PC7) is used for generating / accepting handshake signals for the 8-bit data transfer on port A.

Control signal definitions in mode 2:



- ❑ **INTR** – (Interrupt request) As in mode 1, this control signal is active high and is used to interrupt the microprocessor to ask for transfer of the next data byte to/from it. This signal is used for input (read) as well as output (write) operations.
- ❑ **Control Signals for Output operations:**
- ❑ **OBF** (Output buffer full) – This signal, when falls to low level, indicates that the CPU has written data to port A.
- ❑ **ACK** (Acknowledge) This control input, when falls to logic low level, Acknowledges that the previous data byte is received by the destination and next byte may be sent by the processor. This signal enables the internal tristate buffer to send the next data byte on port A.
- ❑ **INTE1** (A flag associated with OBF) This can be controlled by bit set/reset mode with PC6.

Control signals for input operations:

- ❑ **STB** (Strobe input) a low on this line is used to strobe in the data into the input Latches of 8255.
- ❑ **IBF** (Input buffer full) when the data is loaded into input buffer, this signal rises to logic „1“. This can be used as an acknowledge that the data has been received by the receiver.
- ❑ The waveforms in fig show the operation in Mode 2 for output as well as input port.
- ❑ Note: WR must occur before ACK and STB must be activated before RD.

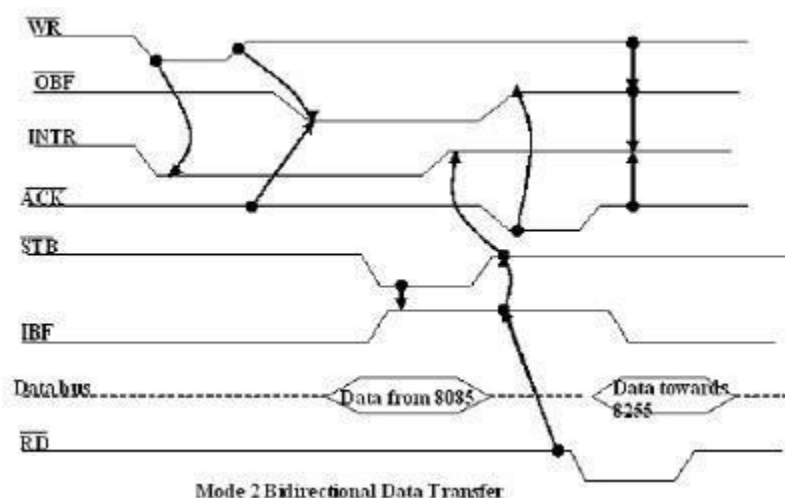

- ❑ The following fig shows a schematic diagram containing an 8-bit bidirectionalport, 5-bit control port and the relation of INTR with the control pins. Port B can either be set to Mode 0 or 1 with port A (Group A) is in Mode 2.
- ❑ Mode 2 is not available for port B. The following fig shows the control word.
- ❑ The INTR goes high only if IBF, INTE2, STB and RD go high or OBF,
- ❑ INTE1, ACK and WR go high. The port C can be read to know the status of the peripheral device, in terms of the control signals, using the normal I/O instructions.

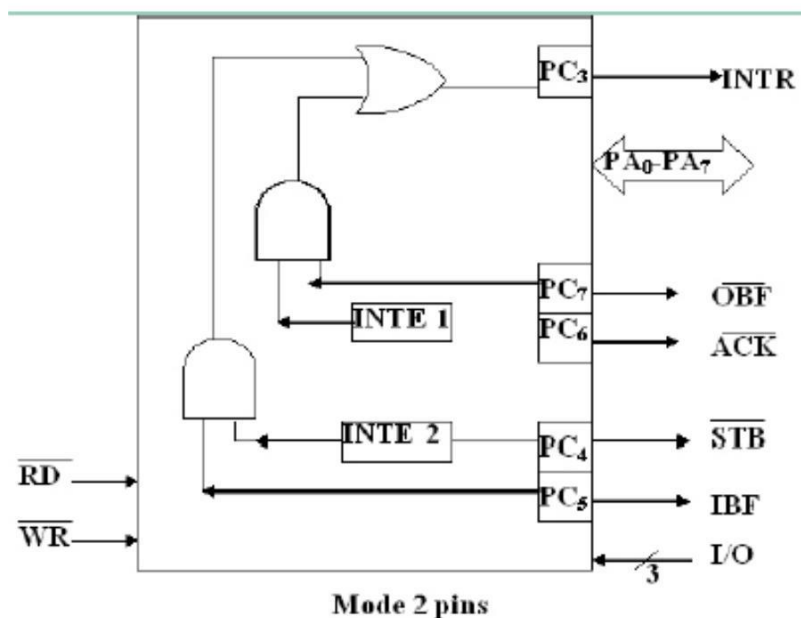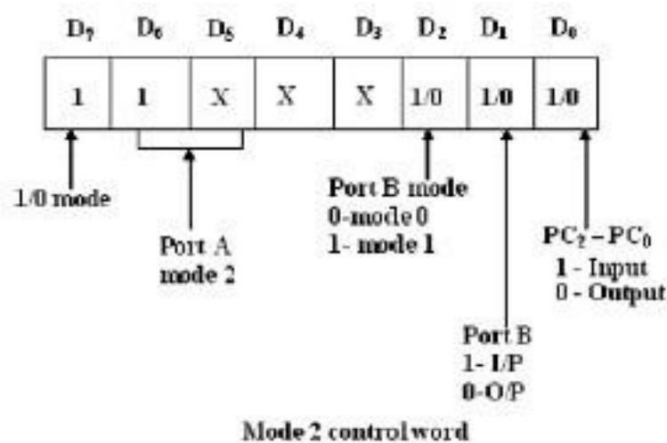

Interfacing Analog to Digital Data Converters:

- In most of the cases, the PIO 8255 is used for interfacing the analog to digital converters with microprocessor.
- We have already studied 8255 interfacing with 8086 as an I/O port, in previous section. This section we will only emphasize the interfacing techniques of analog to digital converters with 8255.
- The analog to digital converters is treated as an input device by the microprocessor that sends an initializing signal to the ADC to start the analogy to digital data conversation process. The start of conversation signal is a pulse of a specific duration.
- The process of analog to digital conversion is a slow
- Process and the microprocessor have to wait for the digital data till the conversion is over. After the conversion is over, the ADC sends end of conversion EOC signal to inform the microprocessor that the conversion is over and the result is ready at the output buffer of the ADC. These tasks of issuing an SOC pulse to ADC, reading EOC signal from the ADC and reading the digital output of the ADC are carried out by the CPU using 8255 I/O ports.
- The time taken by the ADC from the active edge of SOC pulse till the active edge of EOC signal is called as the conversion delay of the ADC.
- It may range anywhere from a few microseconds in case of fast ADC to even a few hundred milliseconds in case of slow ADCs.
- The available ADC in the market use different conversion techniques for conversion of analog signal to digital. Successive approximation techniques and dual slope integration techniques are the most popular techniques used in the integrated ADC chip.
- General algorithm for ADC interfacing contains the following steps:
 - Ensure the stability of analog input, applied to the ADC.
 - Issue start of conversion pulse to ADC
 - Read end of conversion signal to mark the end of conversion processes.
 - Read digital data output of the ADC as equivalent digital output.
 - Analog input voltage must be constant at the input of the ADC right from the start of conversion till the end of the conversion to get correct results. This may be ensured by a sample and hold circuit which samples the analog signal and holds it constant for specific time duration. The microprocessor may issue a hold signal to the sample and hold circuit.
- If the applied input changes before the complete conversion process is over, the digital equivalent of the analog input calculated by the ADC may not be correct.

ADC 0808/0809:

- The analog to digital converter chips 0808 and 0809 are 8-bit CMOS, successive approximation converters. This technique is one of the fast techniques for analog to digital conversion. The conversion delay is 100μs at a clock frequency of 640 KHz, which is quite low as compared to other converters. These converters do not need any external zero or full scale adjustments as they are already taken care of by internal circuits.
- These converters internally have a 3:8 analog multiplexer so that at a time eight different analog conversion by using address lines - ADD A, ADD B, ADD C, as shown. Using these address inputs, multichannel data acquisition system can be designed using a single ADC. The CPU may drive these lines using output port lines in case of multichannel applications. In case of single input applications, these may be hardwired to select the proper input.
- There are unipolar analog to digital converters, i.e. they are able to convert only positive analog input voltage to their digital equivalent. These chips do not contain any internal sample and hold circuit.
- If one needs a sample and hold circuit for the conversion of fast signal into equivalent digital quantities, it has to be externally connected at each of the analog inputs.

Fig (1) and Fig (2) show the block diagrams and pin diagrams for ADC 0808/0809.

Table.1

Analog I/P selected	Address lines		
	C	B	A
I/P 0	0	0	0
I/P 1	0	0	1
I/P 2	0	1	0
I/P 3	0	1	1
I/P 4	1	0	0
I/P 5	1	0	1
I/P 6	1	1	0
I/P 7	1	1	1

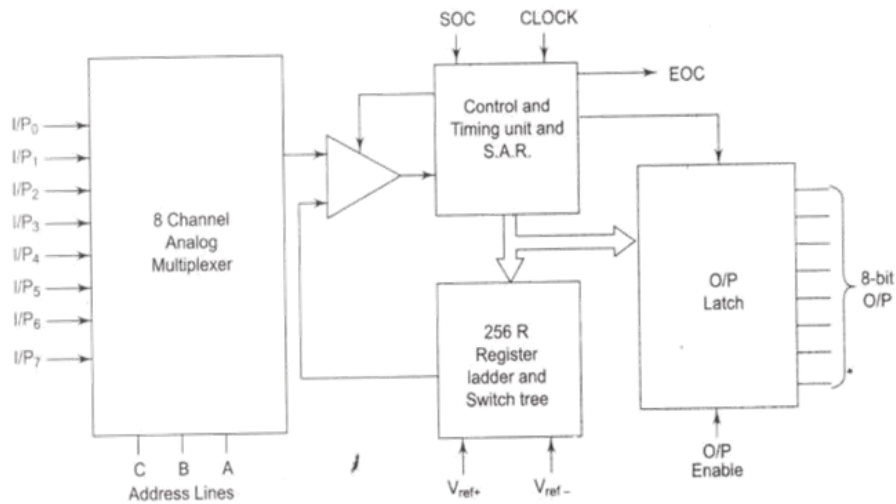


Fig.1 Block Diagram of ADC 0808/0809

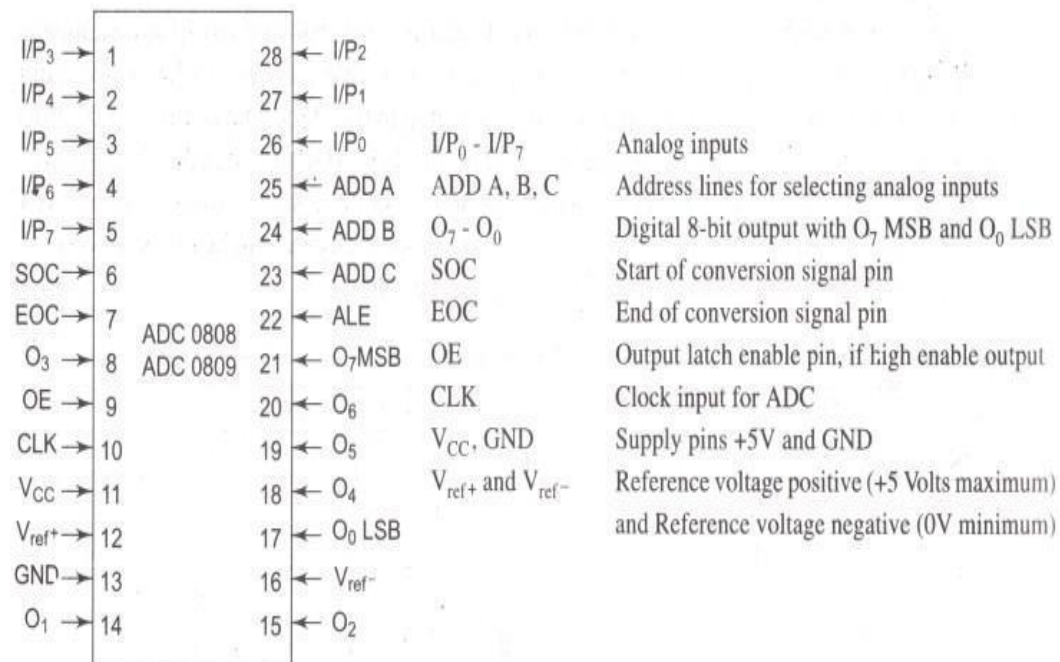


Fig.2 Pin Diagram of ADC 0808/0809

Some Electrical Specifications Of The ADC 0808/0809 Are Given In Table.2.

Table.2

Minimum SOC pulse width	100 ns
Minimum ALE pulse width	100 ns
Clock frequency	10 to 1280 kHz
Conversion time	100 ms at 640 kHz
Resolution	8-bit
Error	+/-1 LSB
V_{ref+}	Not more than +5V
V_{ref-}	Not less than GND
+ V_{cc} supply	+ 5 V DC
Logical 1 i/p voltage	minimum $V_{cc} - 1.5$ V
Logical 0 i/p voltage	maximum 1.5 V
Logical 1 o/p voltage	minimum $V_{cc} - 0.4$ V
Logical 0 o/p voltage	maximum 0.45 V

The Timing Diagram Of Different Signals Of Adc0808 Is Shown In Fig.3


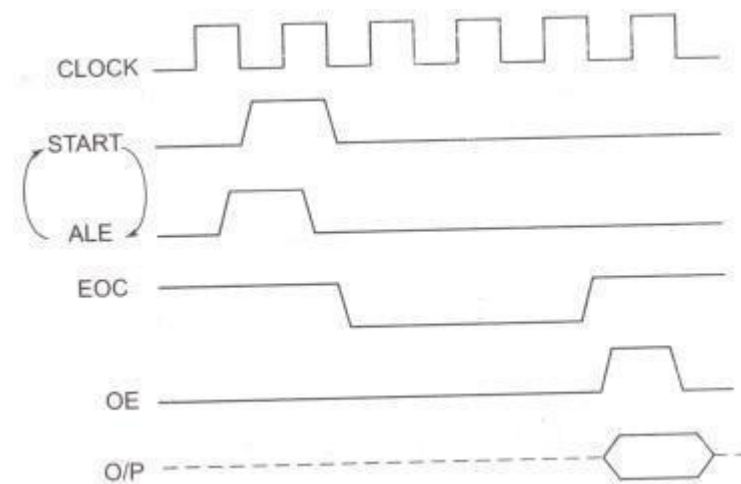


Fig.3 Timing Diagram Of ADC 0808.

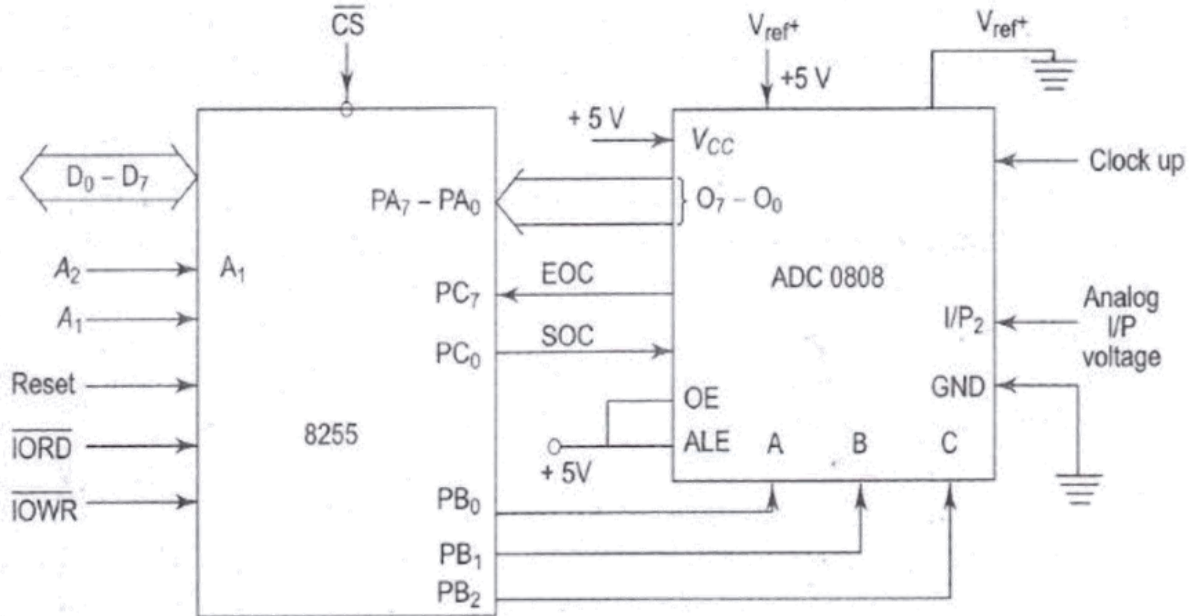

Interfacing ADC0808 with 8086

Interfacing Digital To Analog Converters:

The digital to analog converters convert binary numbers into their analog equivalent voltages. The DAC find applications in areas like digitally controlled gains, motor speed controls, programmable gain amplifiers, etc.


DAC0800 8-bit Digital to Analog Converter

❓ The DAC 0800 is a monolithic 8-bit DAC manufactured by National Semiconductor.


❓ It has settling time around 100ms and can operate on a range of power supply voltages i.e. from 4.5V to +18V.

❓ Usually the supply V_+ is 5V or +12V.

❓ The V_- pin can be kept at a minimum of -12V.

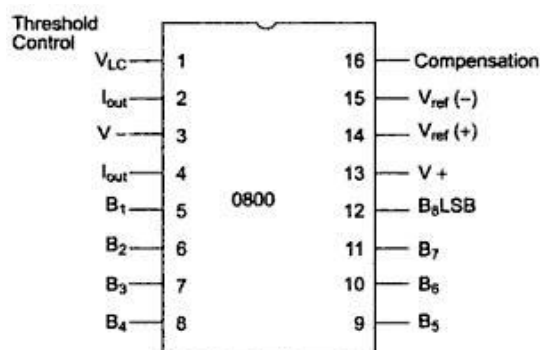


Pin Diagram of DAC 0800

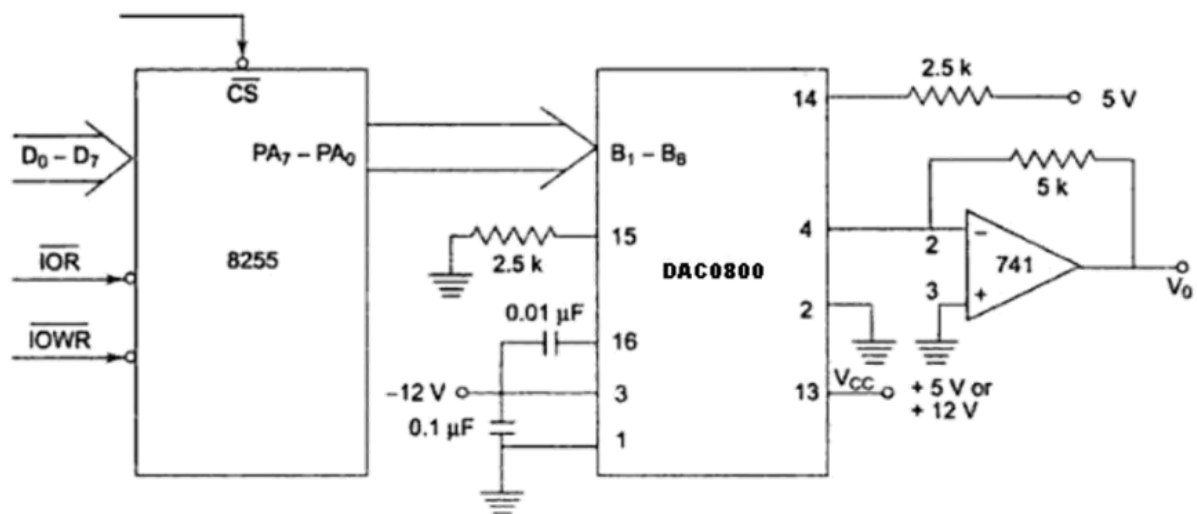

Interfacing DAC0800 with 8086

Ad 7523 8-Bit Multiplying DAC:


- Intersil's AD 7523 is a 16 pin DIP, multiplying digital to analog converter, containing R-2R ladder ($R=10K\Omega$) for digital to analog conversion along with single pole double through NMOS switches to connect the digital inputs to the ladder.

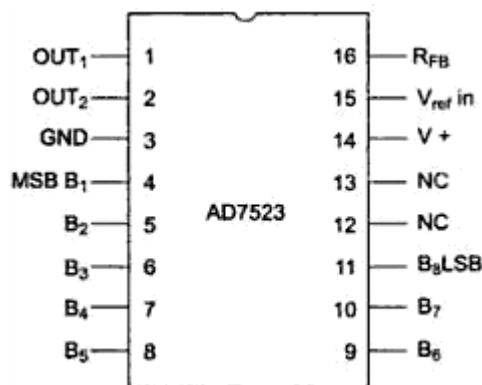

Pin Diagram of AD7523

- The supply range extends from +5V to +15V, while V_{ref} may be anywhere between -10V to +10V. The maximum analog output voltage will be +10V, when all the digital inputs are at logic high state. Usually a Zener is connected between OUT1 and OUT2 to save the DAC from negative transients.
- An operational amplifier is used as a current to voltage converter at the output of AD 7523 to convert the current output of AD7523 to a proportional output voltage.

- It also offers additional drive capability to the DAC output. An external feedback resistor acts to control the gain. One may not connect any external feedback resistor, if no gain control is required.

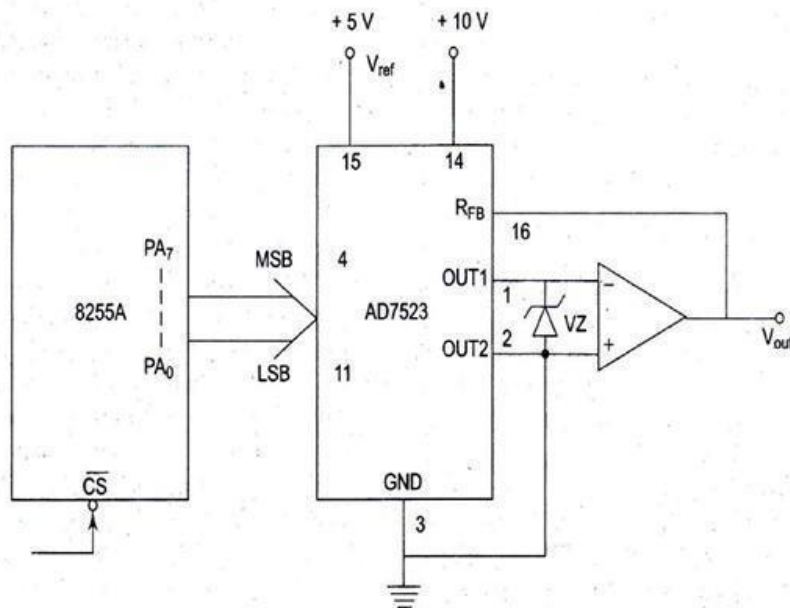

Interfacing AD7523 with 8086

Stepper Motor Interfacing:

- A stepper motor is a device used to obtain an accurate position control of rotating shafts. It employs rotation of its shaft in terms of steps, rather than continuous rotation as in case of AC or DC motors. To rotate the shaft of the stepper motor, a sequence of pulses is needed to be applied to the windings of the stepper motor, in a proper sequence.
- The number of pulses required for one complete rotation of the shaft of the stepper motor is equal to its number of internal teeth on its rotor. The stator teeth and the rotor teeth lock with each other to fix a position of the shaft.
- With a pulse applied to the winding input, the rotor rotates by one teeth position or an angle x . The angle x may be calculated as:

$$X = 360^\circ / \text{no. of rotor teeth}$$

- After the rotation of the shaft through angle x , the rotor locks itself with the next tooth in the sequence on the internal surface of stator.
- The internal schematic of a typical stepper motor with four windings is shown in fig.1.
- The stepper motors have been designed to work with digital circuits. Binary level pulses of 0-5V are required at its winding inputs to obtain the rotation of shafts. The sequence of the pulses can be decided, depending upon the required motion of the shaft.

- Fig.2 shows a typical winding arrangement of the stepper motor.
- Fig.3 shows conceptual positioning of the rotor teeth on the surface of rotor, for a six teeth rotor.

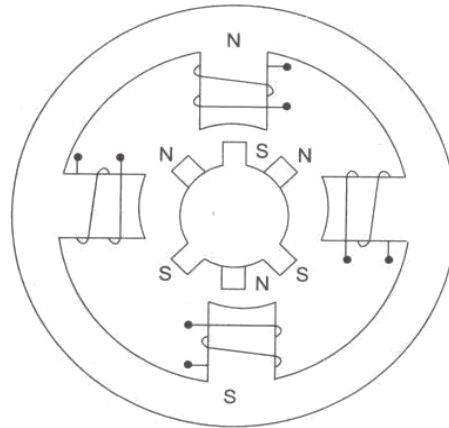


Fig.1 Internal schematic of a four winding stepper motor

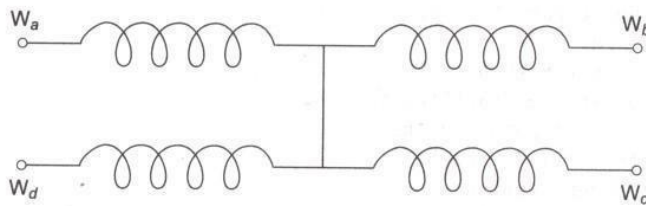


Fig.2 Winding arrangement of a stepper motor.

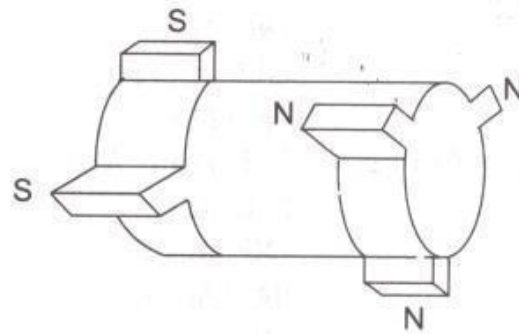


Fig.3 Stepper motor rotor

- The circuit for interfacing a winding W_n with an I/O port is given in fig.4. Each of the windings of a stepper motor needs this circuit for its interfacing with the output port. A typical stepper motor may have parameters like torque 3 Kg-cm, operating voltage 12V, current rating 0.2 A and a step angle 1.8° i.e. 200 steps/revolution (number of rotor teeth).

- ❓ A simple schematic for rotating the shaft of a stepper motor is called a wave scheme. In this scheme, the windings W_a , W_b , W_c and W_d are applied with the required voltage pulses, in a cyclic fashion. By reversing the sequence of excitation, the direction of rotation of the stepper motor shaft may be reversed.
- ❓ Table.1 shows the excitation sequences for clockwise and anticlockwise rotations. Another popular scheme for rotation of a stepper motor shaft applies pulses to two successive windings at a time but these are shifted only by one position at a time. This scheme for rotation of stepper motor shaft is shown in table2.

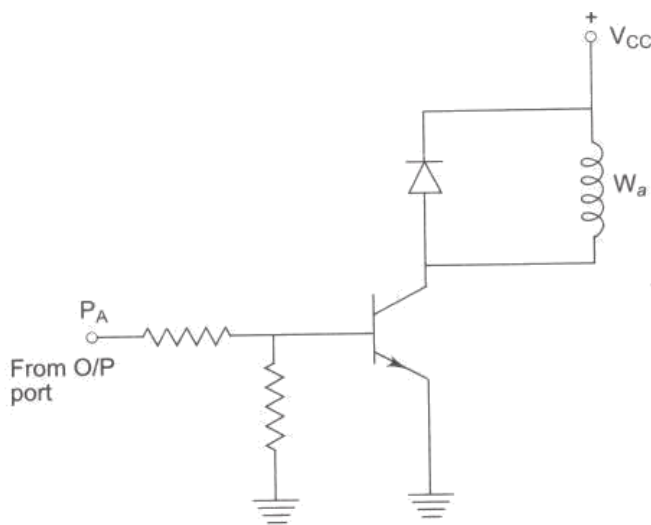


Fig.4 interfacing stepper motor winding.

Table.1 Excitation sequence of a stepper motor using wave switching scheme.

Motion	step	A	B	C	D
Clock wise	1	1	0	0	0
	2	0	1	0	0
	3	0	0	1	0
	4	0	0	0	1
	5	1	0	0	0
Anticlock wise	1	1	0	0	0
	2	0	0	0	1
	3	0	0	1	0
	4	0	1	0	0
	5	1	0	0	0

Table.2 An alternative scheme for rotating stepper motor shaft

Motion	step	A	B	C	D
Clock wise	1	0	0	1	1
	2	0	1	1	0
	3	1	1	0	0
	4	1	0	0	1
	5	0	0	1	1
Anticlock wise	1	0	0	1	1
	2	1	0	0	1
	3	1	1	0	0
	4	0	1	1	0
	5	0	0	0	0

Keyboard Interfacing


- In most keyboards, the key switches are connected in a matrix of Rows and Columns.
- Getting meaningful data from a keyboard requires three major tasks:
 1. Detect a keypress
 2. Debounce the keypress.
 3. Encode the keypress (produce a standard code for the pressed key).

Logic „0“ is read by the microprocessor when the key is pressed.

Key Debounce:

Whenever a mechanical push-button is pressed or released once, the mechanical components of the key do not change the position smoothly; rather it generates a transient response. These may be interpreted as the multiple pressures and responded accordingly.


- ❑ The final task is to determine the row & column of the pressed key & convert this information to Hex-code for the pressed key.
- ❑ The 4-bit code from I/P port & the 4-bit code from O/P port (row & column) are converted to Hex-code.

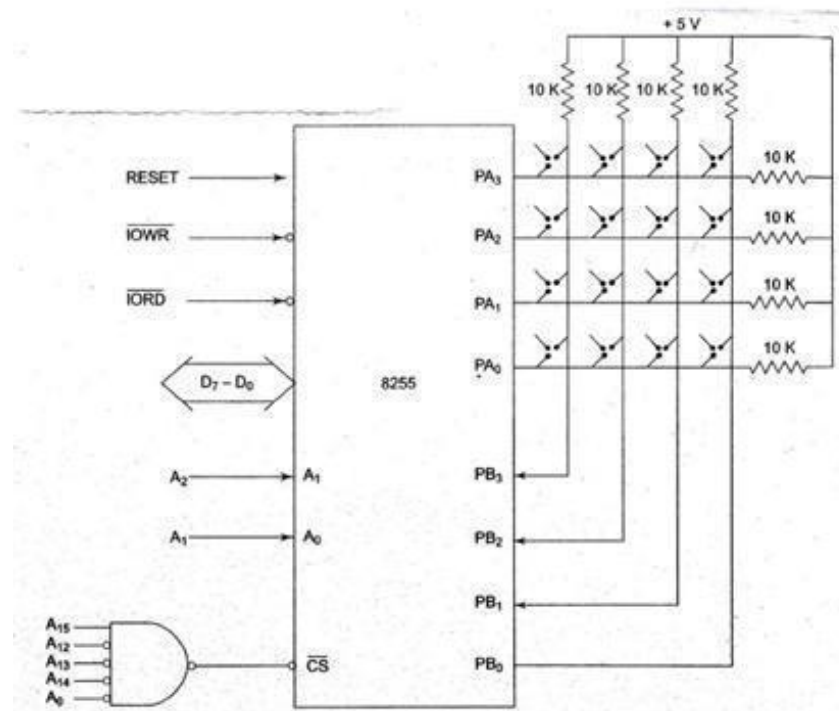

Interfacing 4x4 keyboard

Display Interface

Number to be displayed	PA7d p	PA6 a	PA5 b	PA4 c	PA3 d	PA2 e	PA1 f	PA0 g	Code
1	1	1	0	0	1	1	1	1	CF
2	1	0	0	1	0	0	1	0	92
3	1	0	0	0	0	1	1	0	86
4	1	1	0	0	1	1	0	0	CC
5	1	0	1	0	0	1	0	0	A4

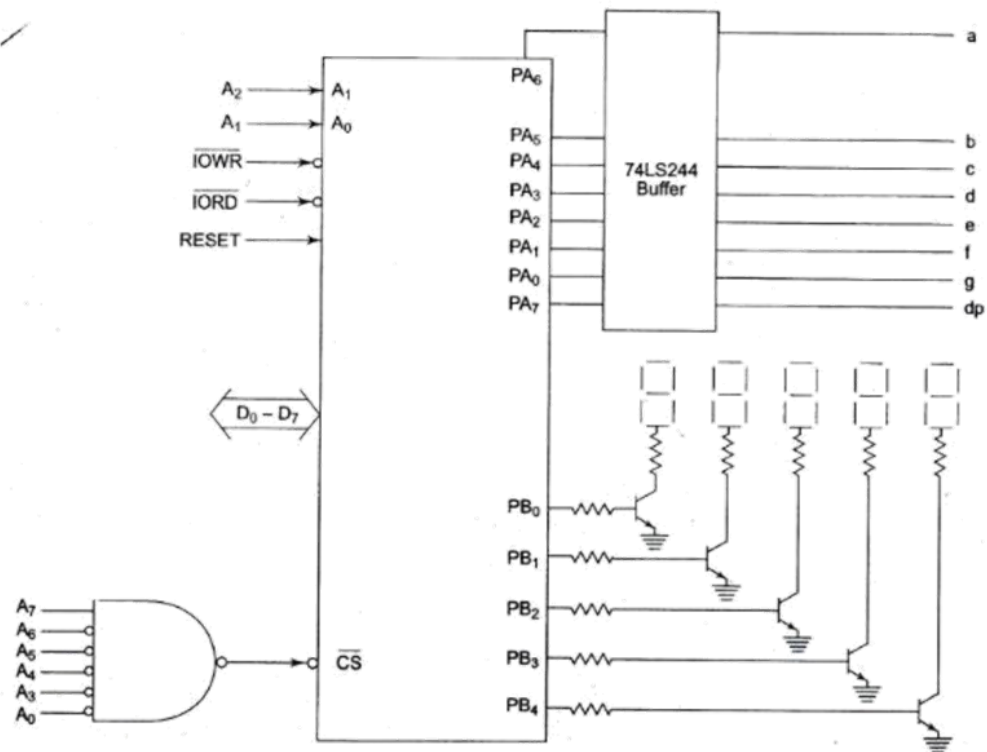

Interfacing multiplexed 7-segment display

Interfacing with Advanced devices

4.1 MEMORY AND I/O INTERFACING

(Ref: Interfacing through Microprocessors by K. Subba Rao, Hi-tech publishers, P. 163-166)

4.1.1 I/O Interface

Any application of a microprocessor system requires the transfer of data between microprocessor and external environment and also within the microprocessor. This is known as Input/Output. There are three different ways that the data transfer can take place. They are

- (1) Program controlled I/O
- (2) Interrupt Program Controlled I/O
- (3) Hardware controlled I/O

In program controlled I/O data transfer scheme the transfer of data is completely under the control of the microprocessor program. In this case an I/O operation takes place only when an I/O transfer instruction is executed.

In an interrupt program controlled I/O an external device indicates directly to the microprocessor its readiness to transfer data by a signal at an interrupt input of the microprocessor. When microprocessor receives this signal the control is transferred to ISS (Interrupt service subroutine) which performs the data transfer.

Hardware controlled I/O is also known as direct memory access DMA. In this case the data transfer takes place directly between an I/O device and memory but not through microprocessors. Microprocessor only initializes the process of data transfer by indicating the starting address and the number of words to be transferred.

The instruction .set of any microprocessor contains instructions that transfer information to an I/O device and to read information from an I/O device. In 8086 we have IN, OUT instructions for this purpose. OUT instruction transfers information to an I/O device whereas IN instruction is used to read information from an I/O device. Both the instructions perform the data transfer using accumulator AL or AX. The I/O address is stored in register DX.

The port number is specified along with IN or OUT instruction. The external I/O interface decodes to find the address of the I/O device. The 8 bit fixed port number appears on address bus $A_0 - A_7$ with $A_8 - A_{15}$ all zeros. The address connections above A_{15} are undefined for an I/O instruction. The 16 bit variable port number appears on address connections $A_0 - A_{15}$. The above notation indicates that first 256 I/O port addresses 00 to FF are accessed by both the fixed and variable I/O instructions. The I/O addresses from 0000 to FFFF are accessed by the variable I/O address.

I/O devices can be interfaced to the microprocessors using two methods. They are I/O mapped I/O and memory mapped I/O. The I/O mapped I/O is also known as isolated I/O or direct I/O. In I/O mapped I/O the IN and OUT instructions transfer data between the accumulator or memory and I/O device. In memory mapped I/O the instruction that refers memory can perform the data transfer.

I/O mapped I/O is the most commonly used I/O transfer technique. In this method I/O locations are placed separately from memory. The addresses for isolated I/O devices are separate from memory. Using this method user can use the entire memory. This method allows data transfer only by using instructions IN, OUT. The pins M/IO and W/R are used to indicate I/O read or an I/O write operations. The signals on these lines indicate that the address on the address bus is for I/O devices.

Memory mapped I/O does not use the IN, OUT instruction it uses only the instruction that transfers data between microprocessor and memory. A memory mapped I/O device is treated as memory location. The disadvantage in this system is the overall memory is reduced. The advantage of this system is that any memory transfer instruction can be used for data transfer and control signals like I/O read and I/O write are not necessary which simplify the hardware.

4.1.2 Memory interfacing

Memory is an integral part of a microcomputer system. There are two main types of memory.

- (i) **Read only memory (ROM):** As the name indicates this memory is available only for reading purpose. The various types available under this category are PROM, EPROM, EEPROM which contain system software and permanent system data.
- (ii) **Random Access memory (RAM):** This is also known as Read Write Memory. It is a volatile memory. RAM contains temporary data and software programs generally for different applications.

While executing particular task it is necessary to access memory to get instruction codes and data stored in memory. Microprocessor initiates the necessary signals when read or write operation is to be performed. Memory device also requires some signals to perform read and write operations using various registers. To do the above job it is necessary to have a device and a circuit, which performs this task is known as interfacing device and as this is involved with memory it is known as memory interfacing device. The basic concepts of memory interfacing involve three different tasks. The microprocessor should be able to read from or write into the specified register. To do this it must be able to select the required chip, identify the required register and it must enable the appropriate buffers.

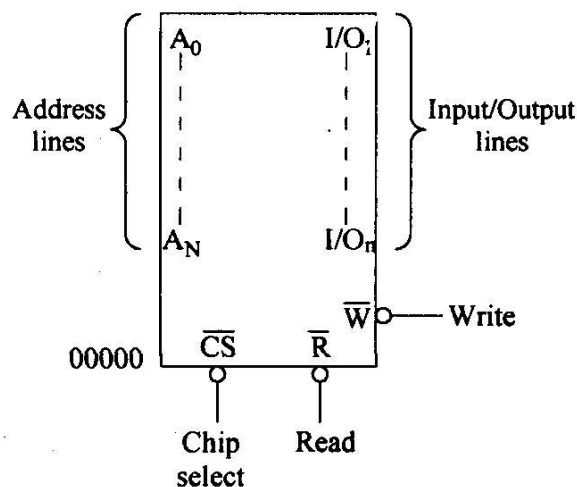


Fig. 3.13 Simple memory device

Any memory device must contain address lines and Input, output lines, selection input, control input to perform read or write operation. All memory devices have address inputs that select memory location within the memory device. These lines are labeled as A_0 A_N . The number of address lines indicates the total memory capacity of the memory device. A 1K memory requires 10 address lines A_0 - A_9 . Similarly a 1MB requires 20 lines A_0 - A_{19} (in the case of 8086). The memory devices may have separate I/O lines or a common set of bidirectional I/O lines. Using these lines data can be transferred in either direction. Whenever output buffer is activated the operation is read whenever input buffers are activated the operation is write. These lines are labelled

as I/O,..... I/O_n or D₀D_n. The size of a memory location is dependent upon the number of data bits. If the number of data lines are eight D₀ - D₇ then 8 bits or 1 byte of data can be stored in each location. Similarly if numbers of data bits are 16 (D₀ - D₁₅) then the memory size is 2 bytes. For example 2K x 8 indicates there are 2048 memory locations and each memory location can store 8 bits of data.

Memory devices may contain one or more inputs which are used to select the memory device or to enable the memory device. This pin is denoted by $\overline{CS}$ (Chip select) or $\overline{CE}$ (Chip enable). When this pin is at logic '0' then only the memory device performs a read or a write operation. If this pin is at logic '1' the memory chip is disabled. If there are more than one $\overline{CS}$ input then all these pins must be activated to perform read or write operation.

All memory devices will have one or more control inputs. When ROM is used we find $\overline{OE}$ output enable pin which allows data to flow out of the output data pins. To perform this task both $\overline{CS}$ and $\overline{OE}$ must be active. A RAM contains one or two control inputs. They are R / W or $\overline{RD}$ and $\overline{WR}$. If there is only one input R/ W then it performs read operation when R/ $\overline{W}$ pin is at logic 1. If it is at logic 0 it performs write operation. Note that this is possible only when $\overline{CS}$ is also active.

4.4 Memory Interface using RAMS, EPROMS and EEPROMS

(Ref: Advanced Microprocessors and Peripherals by A.K. Ray & K.M. Bhurchandi, McGraw-Hill, 2nd Edition.P.158-164)

Semiconductor Memory Interfacing:

Semiconductor memories are of two types, viz. RAM (Random Access Memory) and ROM (Read Only Memory).

Static RAM Interfacing:

The semiconductor RAMs are of broadly two types-static RAM and dynamic RAM. The semiconductor memories are organised as two dimensional arrays of memory locations. For example, 4K x 8 or 4K byte memory contains 4096 locations, where each location contains 8-bit data and only one of the 4096 locations can be selected at a time. Obviously, for addressing 4K bytes of memory, twelve address lines are required. In general, to address a memory location out of N memory locations, we will require at least n bits of address, i.e. n address lines where $n = \log_2 N$. Thus if the microprocessor has n address lines, then it is able to address at the most N locations of memory, where $2^n = N$. However, if out of N locations only P memory locations are to be interfaced, then the least significant p address lines out of the available n lines can be directly connected from the microprocessor to the memory chip while the remaining $(n-p)$ higher order address lines may be used for address decoding (as inputs to the chip selection logic). The memory address depends upon the hardware circuit used for decoding the chip select ($\overline{CS}$). The output of the decoding circuit is connected with the $\overline{CS}$ pin of the memory chip. The general procedure of static memory interfacing with 8086 is briefly described as follows:

1. Arrange the available memory chips so as to obtain 16-bit data bus width. The upper 8-bit bank is called 'odd address memory bank' and the lower 8-bit bank is called 'even address memory bank'.

2. Connect available memory address lines of memory chips with those of the microprocessor and also connect the memory $\overline{RD}$ and $\overline{WR}$ inputs to the corresponding processor control signals. Connect the 16-bit data bus of the memory bank with that of the microprocessor 8086.

3. The remaining address lines of the microprocessor, $\overline{BHE}$ and A_0 are used for decoding the required chip select signals for the odd and even memory banks. $\overline{CS}$ of memory is derived from the O/P of the decoding circuit.

As a good and efficient interfacing practice, the address map of the system should be continuous as far as possible, i.e. there should be no windows in the map. A memory location should have a single address corresponding to it, i.e. absolute decoding should be preferred, and minimum hardware should be used for decoding. In a number of cases, linear decoding may be used to minimise the required hardware. Let us now consider a few example problems on memory interfacing with 8086.

Problem 5.1

Interface two $4K \times 8$ EPROMs and two $4K \times 8$ RAM chips with 8086. Select suitable maps.

Solution We know that, after reset, the IP and CS are initialised to form address FFFF0H. Hence, this address must lie in the EPROM. The address of RAM may be selected any where in the 1MB address space of 8086, but we will select the RAM address such that the address map of the system is continuous, as shown in Table 5.1.

Table 5.1 Memory Map for Problem 5.1

Address	A_{19}	A_{18}	A_{17}	A_{16}	A_{15}	A_{14}	A_{13}	A_{12}	A_{11}	A_{10}	A_{09}	A_{08}	A_{07}	A_{06}	A_{05}	A_{04}	A_{03}	A_{02}	A_{01}	A_{00}
FFFFFH	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
EPROM								8K $\times$ 8												
FE000H	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
FDFFFH	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	1	1	1	1
RAM								8K $\times$ 8												
FC000H	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Total 8K bytes of EPROM need 13 address lines $A_0 - A_{12}$ (since $2^{13} = 8K$). Address lines $A_{13} - A_{19}$ are used for decoding to generate the chip select. The $\overline{BHE}$ signal goes low when a transfer is at odd address or higher byte of data is to be accessed. Let us assume that the latched address, $\overline{BHE}$ and demultiplexed data lines are readily available for interfacing. Figure 5.1 shows the interfacing diagram for the memory system.

The memory system in this example contains in total four $4K \times 8$ memory chips.

The two $4K \times 8$ chips of RAM and ROM are arranged in parallel to obtain 16-bit data bus width. If A_0 is 0, i.e. the address is even and is in RAM, then the lower RAM chip is selected indicating 8-bit transfer at an even address. If A_0 is 1, i.e. the address is odd and is in RAM, the $\overline{BHE}$ goes low, the upper RAM chip is selected, further indicating that the 8-bit transfer is at an odd address. If the selected addresses are in ROM, the respective ROM chips are selected. If at a time A_0 and $\overline{BHE}$ both are 0, both the RAM or ROM chips are selected, i.e. the data transfer is of 16 bits. The selection of chips here takes place as shown in Table 5.2.

Table 5.2 Memory Chip Selection for Problem 5.1

Decoder I/P → Address/BHE →	A_2 A_{13}	A_1 A_0	A_0 BHE	Selection/ Comment
Word transfer on $D_0 - D_{15}$	0	0	0	Even and odd addresses in RAM
Byte transfer on $D_7 - D_0$	0	0	1	Only even address in RAM
Byte transfer on $D_8 - D_{15}$	0	1	0	Only odd address in RAM
Word transfer on $D_0 - D_{15}$	1	0	0	Even and odd addresses in ROM
Byte transfer on $D_0 - D_7$	1	0	1	Only even address in ROM
Byte transfer on $D_8 - D_{15}$	1	1	0	Only odd address in ROM

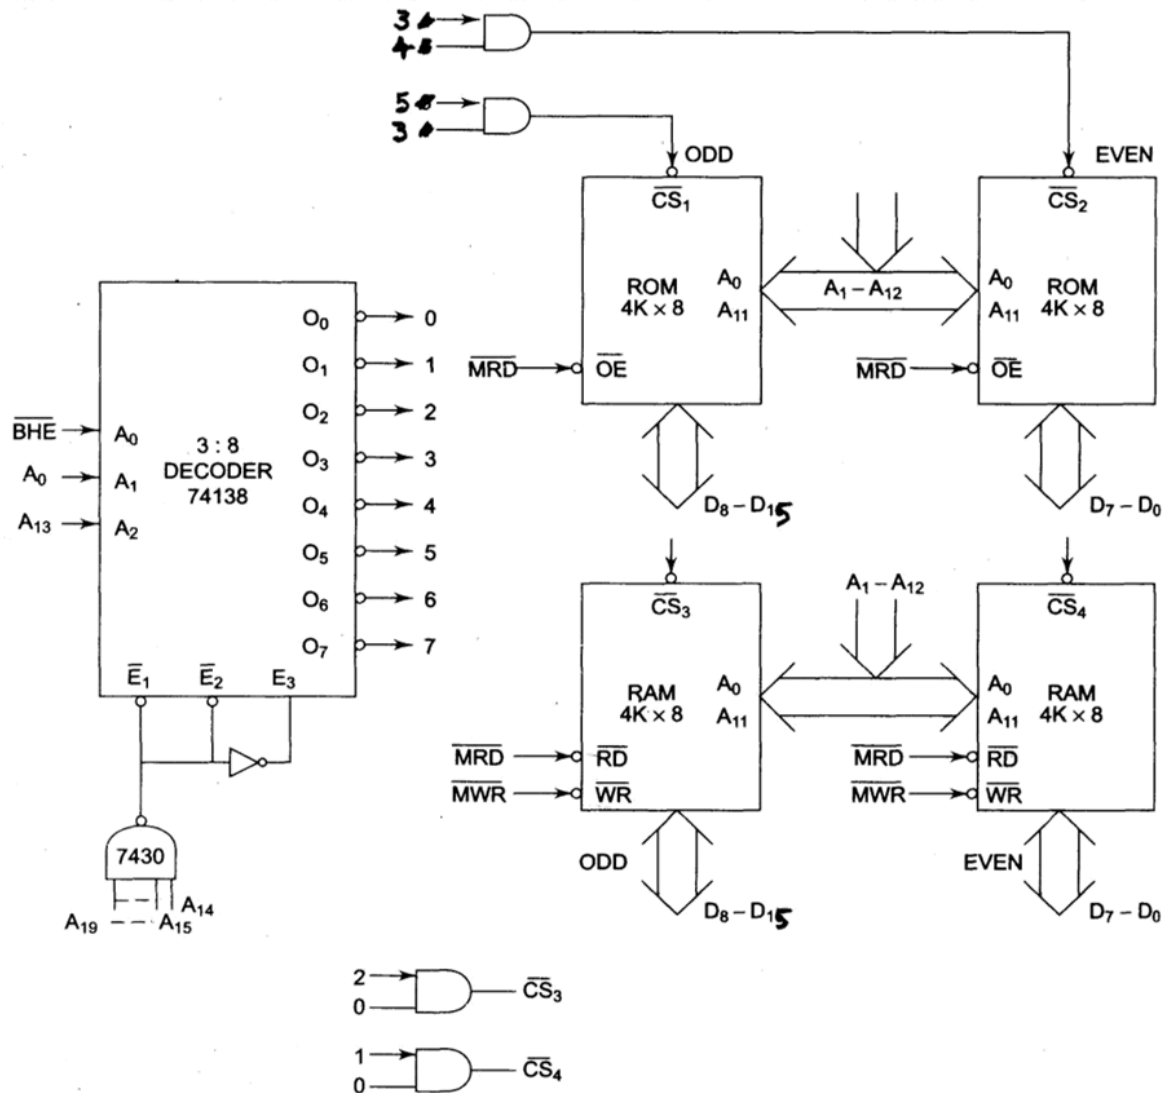


Fig. 5.1 Interfacing Problem 5.1

Problem 5.2

Design an interface between 8086 CPU and two chips of $16K \times 8$ EPROM and two chips of $32K \times 8$ RAM. Select the starting address of EPROM suitably. The RAM address must start at 00000H.

Solution: The last address in the map of 8086 is FFFFFH. After resetting, the processor starts from FFFF0H. Hence this address must lie in the address range of EPROM. Figure 5.2 shows the interfacing diagram, and Table 5.3 shows complete map of the system.

Table 5.3 Address Map for Problem 5.2

Addresses	A_{19}	A_{18}	A_{17}	A_{16}	A_{15}	A_{14}	A_{13}	A_{12}	A_{11}	A_{10}	A_{09}	A_{08}	A_{07}	A_{06}	A_{05}	A_{04}	A_{03}	A_{02}	A_{01}	A_{00}
FFFFFH	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	32KB EPROM																			
F8000H	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
0FFFFH	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	64KB RAM																			
00000H	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

It is better not to use a decoder to implement the above map because it is not continuous, i.e. there is some unused address space between the last RAM address (0FFFFH) and the first EPROM address (F8000H). Hence the logic is implemented using logic gates, as shown in Fig. 5.2.

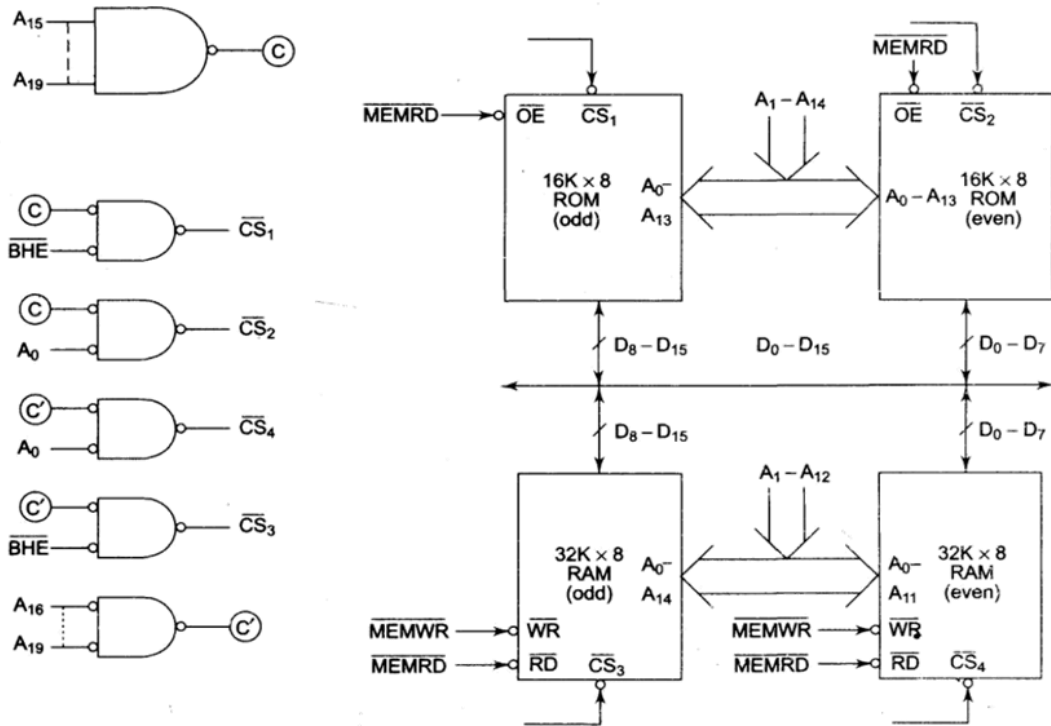


Fig. 5.2 Interfacing Problem 5.2

Problem 5.3

It is required to interface two chips of $32K \times 8$ ROM and four chips of $32K \times 8$ RAM with 8086, according to the following map.

ROM 1 and 2 F0000H - FFFFFH, RAM 1 and 2 D0000H - DFFFFH
RAM 3 and 4 E0000H - EFFFFH

Show the implementation of this memory system.

Solution Let us write the memory map of the system as shown in Table 5.6.

The implementation of the above map is shown in Fig. 5.3 using the same technique as in Problem 5.1 and Problem 5.2. All the address, data and control signals are assumed to be readily available.

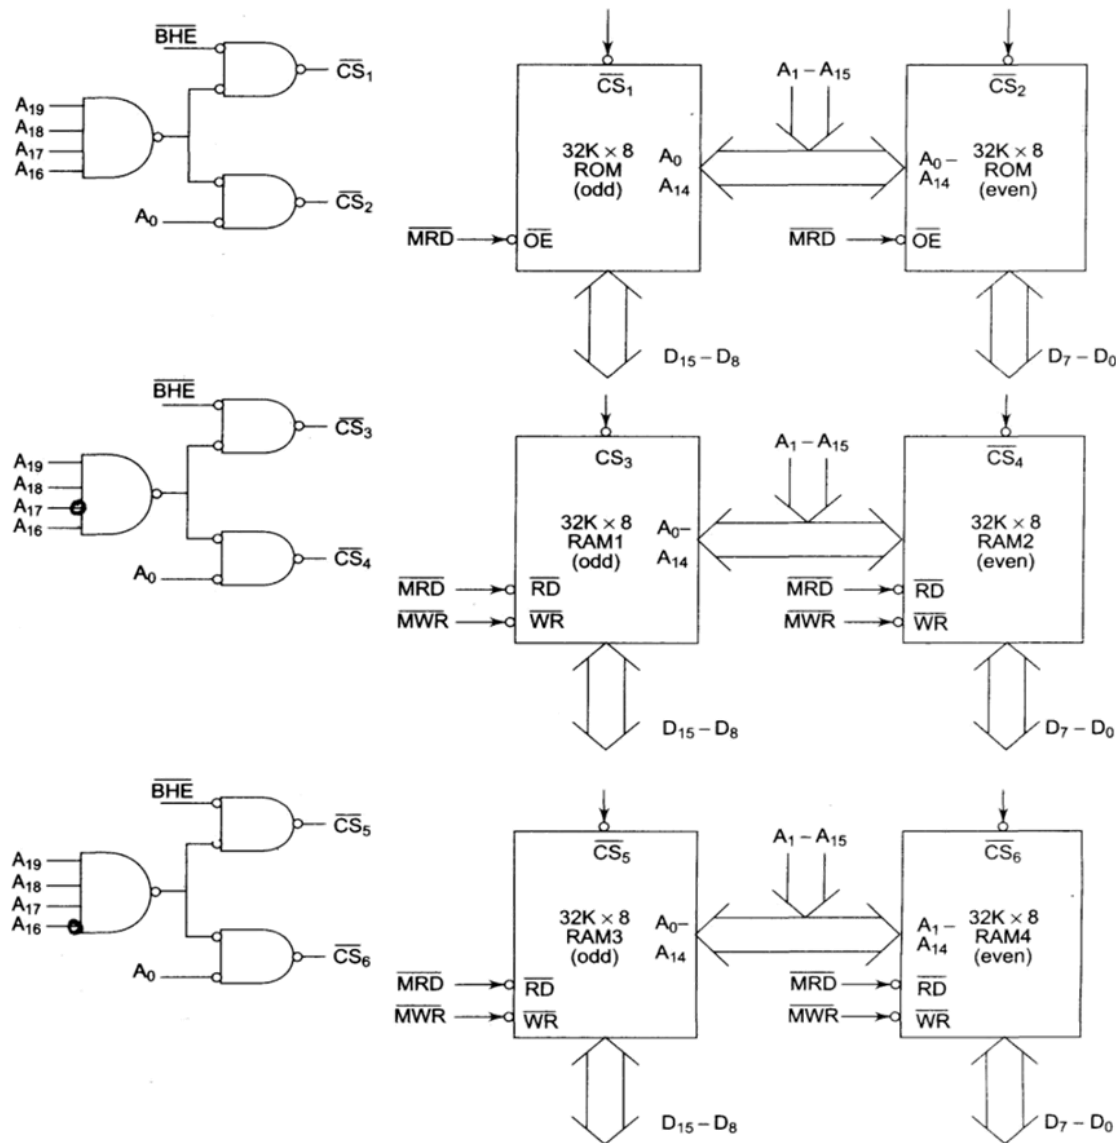


Fig. 5.3 Interfacing Problem 5.3

SERIAL COMMUNICATION STANDARDS

(Ref: Interfacing through Microprocessors by K. Subba Rao, Hi-tech publishers, P. 250-260)

Most of devices are parallel in nature. These devices transfer data simultaneously on data lines. But parallel data transfer process is very complicated and expensive. Hence in some situations the serial I/O mode is used where one bit is transferred over a single line at a time. In this type of transmission parallel word is converted into a stream of serial bits which is known as parallel to serial conversion. The rate of transmission in serial mode is BAUD, i.e., bits per second. The serial data transmission involves starting, end of transmission, error verification bits along with the data. Any serial I/O involves the following concepts.

(a) Interfacing requirements (b) Alphanumeric codes (c) Transmission format (d) Error checks in data communication (e) Data communication over lines (f) Standards in serial I/O

The microprocessor has to identify the port address to perform read or write operation. Serial I/O uses only one data line, chip select, read, write control signals.

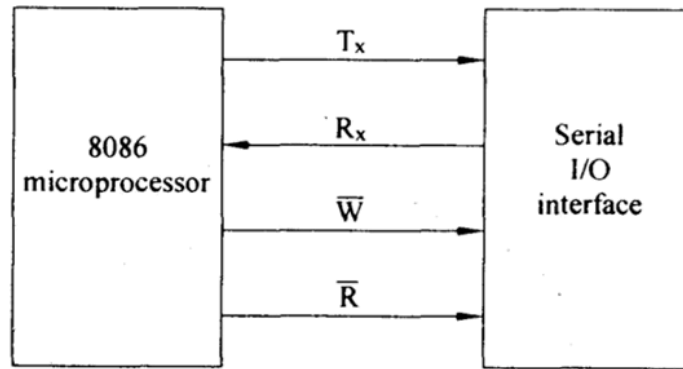


Fig. 5.1 Block diagram of serial I/O interfacing

Data transfer takes place using ASCII code (American standard code for Information Interchange) which is 7 bit code with 128 combinations. The data can be transmitted by taking various parameters into consideration such as synchronization or asynchronization, direction of data flow speed, errors, medium of data transmission etc. In synchronous transmission both transmitter and receiver operate, in synchronous to each other.

Synchronization used for high speed operations. In asynchronous data transmission data is transmitted between Start and Stop bits with logic 1 as mark logic 0 as space. In asynchronous we get around 11 bits for data transmission one start, 8 bits of data, 2 stop bits. A synchronous data transmission is used for less than 20 Kbits /second transmission.


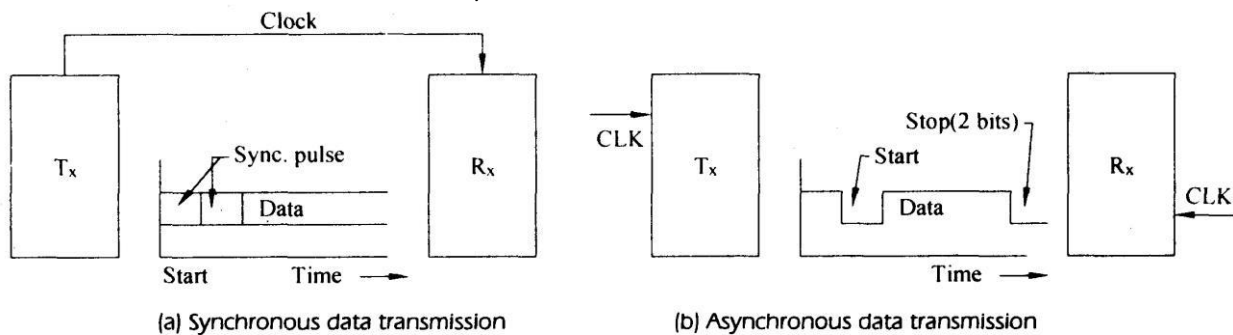


Fig. 5.2 Data communication

DIFFERENCE BETWEEN SYNCHRONOUS AND ASYNCHRONOUS TRANSMISSION

S.No.	Synchronous	Asynchronous
1.	Same clock pulse is applied to both Tx & Rx simultaneously	Different clock pulses are applied to Tx & Rx separtely
2.	Only hardware is required to implement this.	Both hardware and software are required for this.
3.	Group or a set of characters can be transmitted at a time.	Only one character is transmitted at a time.
4.	Synchronous pulses are required	Synchronous pulses are not required but uses start and stop bits.
5.	Uses for high speed Tx.	Used for low speed Tx.

5.2 UNIVERSAL SYNCHRONOUS/ASYNCHRONOUS RECEIVER/TRANSMITTER (USART)

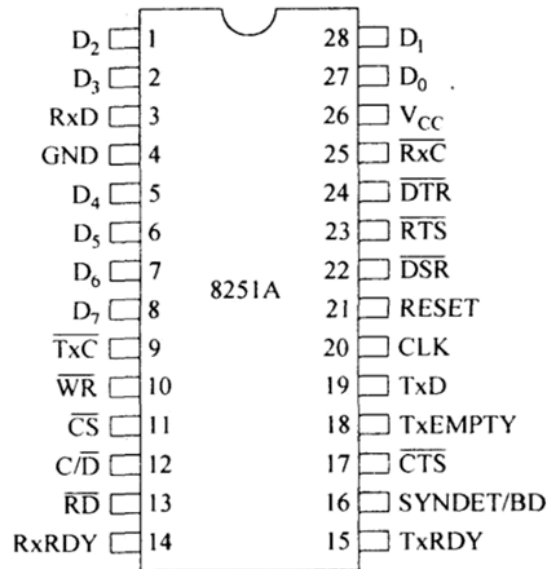

Pin diagram of 8251

The 8251A is Universal Synchronous/Asynchronous Receiver/Transmitter (USART) designed for the data communication with Intel's family of microprocessor such as 8085, 8086 and 8088. Like other I/O devices in a microcomputer system, its functional configuration is programmed by the system's software for maximum flexibility. The USART accepts data characters from the CPU in the parallel format and converts them into continuous serial data stream for transmission. Simultaneously, it can receive serial data streams and convert them into parallel data characters for the CPU. The CPU can read the complete status of USART at any time, these includes data transmission errors, control signals etc.

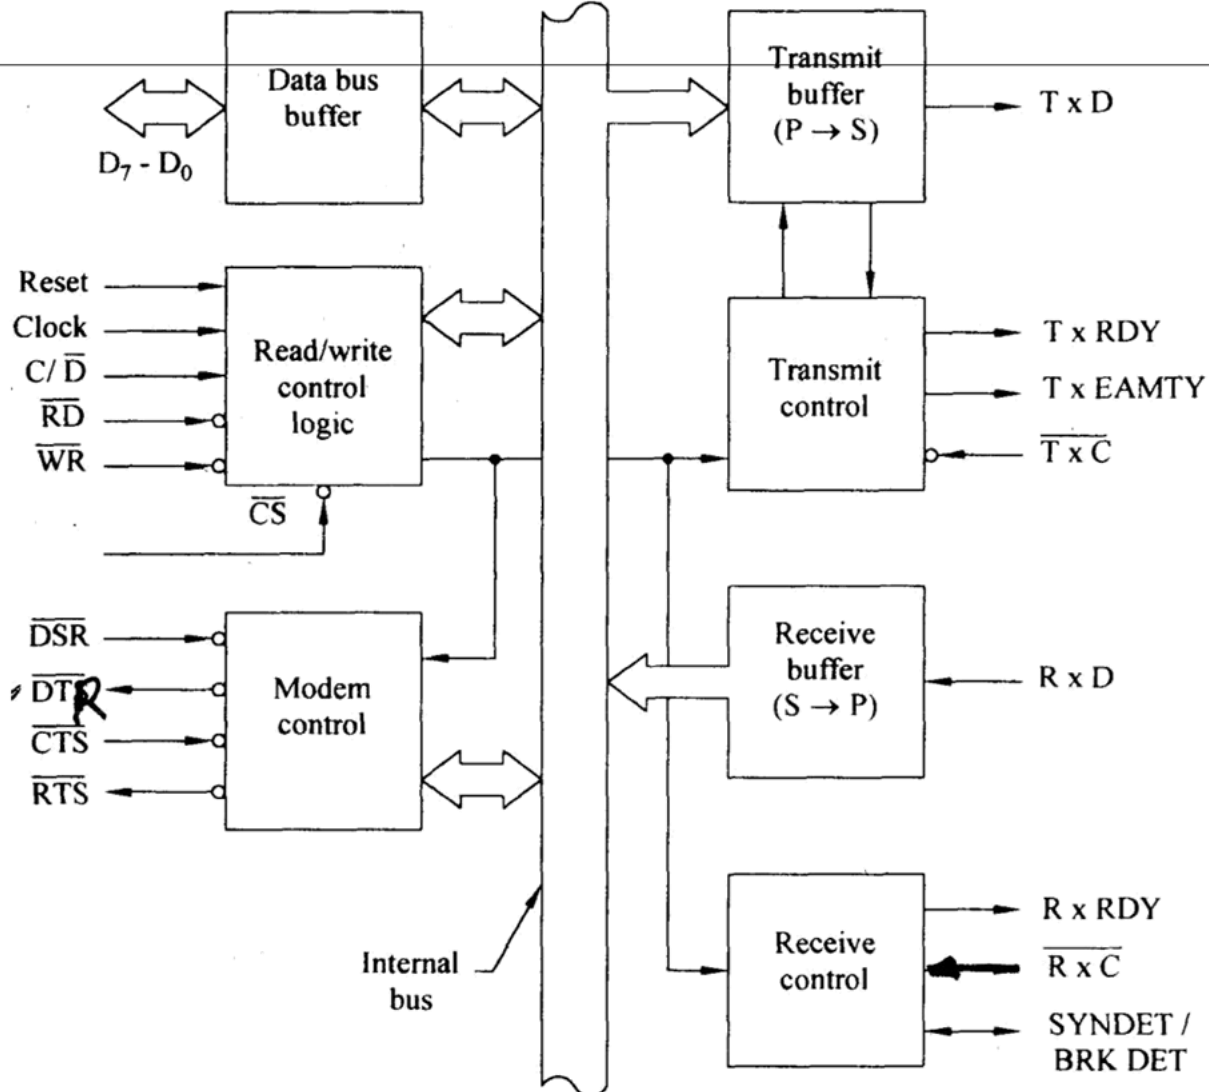


Fig. 5.7 Block diagram of 8251

Fig. 5.7 shows the block diagram of 8251 A. The block diagram shows all the elements of a programmable chip; it includes the interfacing signals, the control register and the status register. The functions of various blocks are described below:

(A) Data bus buffer: This 3-state, bidirectional buffer is used to interface the 8251A to the system data bus. Data is transmitted or received by the buffer upon execution of input and output instruction of the CPU. Command words and status information are also transferred through the data bus buffer. The command, status and data in and data out are separate 8-bit registers to provide double buffering.

The functional block accepts inputs from the control bus and generates control signals for overall device operation. It contains the control word register and command word register that store the various control formats for the device functional definition.

(B) Read/Write logic and Registers:

This section includes R/W control logic, six input signals, control logic, and three buffer registers; data register, control register and status register. The input signals to control logic are as follows:

RESET: A high on this input forces the 8251A into an idle mode. The device will remain at idle until a new set of control words is written into the 8251A to program its functional definition.

A command reset operation also puts the device into the idle state.

CLK (Clock): The CLK input is used to generate internal device timing and is normally connected to the phase 2 (TTL) output of the Clock Generator. No external inputs or outputs are referenced to CLK but the frequency of CLK must be greater than 30 times the Receiver or Transmitter data bit rates.

WR (Write): A "low" on this input informs the 8251A that the CPU is writing data or control words to the 8251A.

RD (Read): A "low" on this input informs the 8251A that the CPU is reading data or status information from the 8251A.,

C/ $\overline{D}$	RD	WR	CS	
0	0	1	0	8251 data-data bus
0	1	0	0	Data bus-8251A data
1	0	1	0	Status-data bus
1	1	0	0	Data bus-control
x	1	1	0	Data bus-3 state
x	x	x	1	Data bus 3 state

C/ $\overline{D}$ (Control/Data): This input, in conjunction with the $\overline{WR}$ and $\overline{RD}$ inputs informs the 8251A that the word on the Data bus is either a data character, control word or status information.

1 = CONTROL/STATUS; 0 = DATA

CS (Chip Select) : A "low" on this input selects the 8251A. No reading or writing will occur unless the device is selected. When CS is high, the Data Bus is in the float state and RD and WR have no effect on the chip.

(C) Modem Control:

The 8251A has a set of control inputs and outputs that can be used to simplify the interface to almost any modem. The modem control signals are general purpose in nature and can be used for functions other than modem control, if necessary.

DSR (Data Set Ready) : The $\overline{DSR}$ input signal is a general-purpose, 1-bit inverting input port. Its condition can be tested by the CPU using a Status Read operation. The DSR input is normally used to test modem condition such as Data Set Ready.

$\overline{\text{DTR}}$ (Data Terminal Ready): The $\overline{\text{DTR}}$ output signal is a general-purpose, 1-bit inverting output port. It can be set "low" by programming the appropriate bit in the Command instruction word. The $\overline{\text{DTR}}$ output signal is normally used for modem control such as Data Terminal Ready.

$\overline{\text{RTS}}$ (Request to Send): The $\overline{\text{RTS}}$ output signal is a general-purpose, 1-bit inverting output port. It can be set "low" by programming the appropriate bit in the Command instruction word. The $\overline{\text{RTS}}$ output signal is normally used for modem control such as Request to send.

$\overline{\text{CTS}}$ (Clear to Send): A "low" on this input enables the 8251A to transmit serial data if the Tx Enable bit in the Command byte is set to a "one", if either a Tx Enable off or $\overline{\text{CTS}}$ off condition occurs while the Tx is in operation, the Tx will transmit all the data in the USART, written prior to Tx Disable command before shutting down.

(D) Transmitter Buffer:

The transmitter Buffer accepts parallel data from the Data Bus Buffer, converts it to a serial bit stream, inserts the appropriate characters or bits (based on the communication technique) and outputs a composite serial stream of data on the TxD output pin on the falling edge of $\overline{\text{TxC}}$. The transmitter will begin transmission upon being enabled, if $\overline{\text{CTS}} = 0$. The $\overline{\text{TxC}}$ line will be held in the marking state immediately upon a master Reset or when Tx Enable or $\overline{\text{CTS}}$ is off or the transmitter is empty.

(E) Transmitter Control:

The Transmitter Control manages all activities associated with the transmission of serial data. It accepts and issues signals both externally and internally to accomplish this function.

T x RDY (Transmitter Ready): This output signals the CPU that the transmitter is ready to accept a data character. The T x RDY output pin can be used as an interrupt to the system, since it is masked by Tx Enable; or, for Polled operation, the CPU can check T x RDY using a Status Read operation. T x RDY is automatically reset by the leading edge of $\overline{\text{WR}}$ when a data character is loaded from the CPU.

T x E (Transmitter Empty): When the 8251A has no character to send, the T x empty will go high. It resets upon receiving a character from CPU if the transmitter is enabled. Tx empty remains high when the transmitter is disabled. T x Empty can be used to indicate the end of transmission node, so that the CPU knows when to turn around in the half-duplex operation mode.

In the synchronous mode, a high on this output indicates that a character has not been loaded and the SYNC character or characters are about to be are being transmitted as filters. T x Empty does not go low when the Sync characters are being shifted out.

T x C (Transmitter Clock): The Transmitter Clock control the rate at which the character is to be transmitted. In the Synchronous transmission mode, the Baud Rate (1x) is equal to the T x C frequency. In Asynchronous transmission mode, the baud rate is a fraction of the actual T x C frequency. A portion of the mode instruction selects this factor it can be 1, 1/16 or 1/64 the T x C.

For example

If Baud rate equals 220 Baud

$\overline{\text{TxC}}$ equals 220 Hz in the 1x mode.

$\overline{\text{TxC}}$ equals 3.52 KHz in the 16x mode.

$\overline{\text{TxC}}$ equals 14.08 KHz in the 64x mode.

The falling edge of $\overline{\text{TxC}}$ shifts the serial data out of the 8251A.

(F) Receiver Buffer:

The Receiver accepts serial data, converts this serial input to parallel format checks for bits or characters that are unique to the communication technique and sends an "assembled" character to the CPU. Serial data is input to $\text{R} \times \text{D}$ pin, and is clocked in on this rising edge of $\overline{\text{R} \times \text{C}}$.

(G) Receiver Control:

This functional block shown in Fig. manages all receiver - related activities which consists of the following features.

The $\text{R} \times \text{D}$ initialization circuits prevents the 8251A from mistaking an unused input line for an active low data line in the break condition. Before starting to receive serial characters on the $\text{R} \times \text{D}$ line, a valid '1' must first be detected after a chip master reset. Once this has been determined, a search for a valid low bit (start bit) is enabled. This feature is only active in the asynchronous mode, and is only done once for each master reset.

The false start bit detection circuit prevents false starts due to a transient noise spike by first detecting the falling edge and then strobing the nominal center of the start ($\text{R} \times \text{D} = \text{low}$).

Parity error detection sets the corresponding status bit.

The framing error status bit is set if the stop bit is absent at the end of the data byte (asynchronous mode).

$\text{R} \times \text{RDY}$ (Receiver Ready) : This output indicates the the 8251A contains a character that is ready to be input to the CPU. $\text{R} \times \text{RDY}$ can be connected to the interrupt structure of the CPU or, for polled operation, the CPU can check the condition of $\text{R} \times \text{RDY}$ using a status read operation.

$\text{R} \times \text{Enable}$, when off, holds $\text{R} \times \text{RDY}$ in the reset condition. For asynchronous mode, to set $\text{R} \times \text{RDY}$, the receiver must be enabled to sense a start bit and a complete character must be assembled and transferred to the data output register.

Failure to read the received character from the $\text{R} \times \text{Data}$ output register prior to the assembly of the next $\text{R} \times \text{data}$ character will set overrun condition error and the previous character will be written over and lost. If the $\text{R} \times \text{data}$ is being read by the CPU when the internal transfer is occurring, overrun error will be set and the old character will be lost.

$\overline{R \times C}$ (Receiver Clock) : The receiver clock controls the rate at which the character is to be received. In synchronous mode, the baud rate ($1 \times$) is equal to the actual frequency of $\overline{R \times C}$. In asynchronous mode, the baud rate is a fraction of the actual $\overline{R \times C}$ frequency. A portion of the mode instruction selects this factor: 1, 1/16 or 1/64 the $\overline{R \times C}$.

For Example:

Baud rate equals 200 baud, if

$\overline{R \times C}$ equals 200 Hz in the $1 \times$ mode.

$\overline{R \times C}$ equals 3200 Hz in the $16 \times$ mode.

$\overline{R \times C}$ equals 128 KHz in the $64 \times$ mode.

SYNDET (SYNC Detect/BRKDET Break Detect): This is used in Synchronous Mode for SYNDET and may be used as either input or output, programmable through the Control Word. It is reset to output mode low upon RESET. When used as an output (internal Sync mode), the SYNDET pin will go "high" to indicate that the 8251A has located the SYNC character in the Receive mode. If the 8251A is programmed to use double Sync characters (bi-sync), then SYNDET will go "high" in the middle of the last bit of the second Sync character. SYNDET is automatically reset upon a status Read operation.

When used as an input (external SYNC detect mode), a positive going signal will cause the 8251A to start assembling data characters on the rising edge of the next $\overline{R \times C}$. Once in SYNC, the "high" input signal can be removed. When External SYNC Detect is programmed, internal SYNC Detect is disabled.

BREAK (Async Mode Only): This output will go high whenever the receiver remains low through two consecutive stop bit sequences (including the start bits, data bits, and parity bits); Break Detect may also be read as a Status bit. It is reset only upon a master chip Reset of $R \times$ Data returning to a "one" state.

INTERFACING STANDARDS

(Ref: Interfacing through Microprocessors by K. Subba Rao, Hi-tech publishers, P. 266)

Serial I/O is used to interface various devices or for connecting various equipment to the system. Common understanding is necessary among various manufacturers such that a standard notation is followed for interfacing these components. These standards may be provided by IEEE or by any standard professional organisation. The serial I/O standards must specify clearly voltage levels, speed of data transfer, length of cables etc. In serial I/O data can be transmitted as either current or voltage. 20 mA or 60 mA current loops are used if data is transmitted using current. Current flow takes place when the system is at logic 1. The current flow is stopped when the system is at logic 0. In the current loop method the signals are relatively noise-free and they are best suited for long distance transmission.

RS-232 is developed long before which is used for communication between terminals and modems. Using RS-232C data can be transmitted as voltage. The data terminals equipment and data communication equipment are used to communicate using RS-232C cable. RS-232C is not compatible with TTL logic and cannot be used for long distance transmission.

RS-232C Serial Data Standard

(Ref: Microprocessors and interfacing by Douglas V. Hall, 2nd edition, TMH, P.494-495)

OVERVIEW

Modems were developed so that terminals could use phone lines to communicate with distant computers. As we stated earlier, modems and other devices used to send serial data are often referred to as *data communication equipment* or DCE. The terminals or computers that are sending or receiving the data are referred to as *data terminal equipment* or DTE. In response to the need for signal and handshake standards between DTE and DCE, the Electronic Industries Association (EIA) developed EIA standard RS-232C. This standard describes the function of 25 signal and handshake pins for serial-data transfer. It also describes the voltage levels, impedance levels, rise and fall times, maximum bit rate, and maximum capacitance for these signal lines.

RS-232C specifies 25 signal pins, and it specifies that the DTE connector should be a male and the DCE connector should be a female. A specific connector is not given, but the most commonly used connectors are the DB-25P male shown in Figure 14-7a. For systems where many of the 25 pins are not needed, a 9-pin DIN connector such as the DE-9P male connector shown in Figure 14-7b is used.

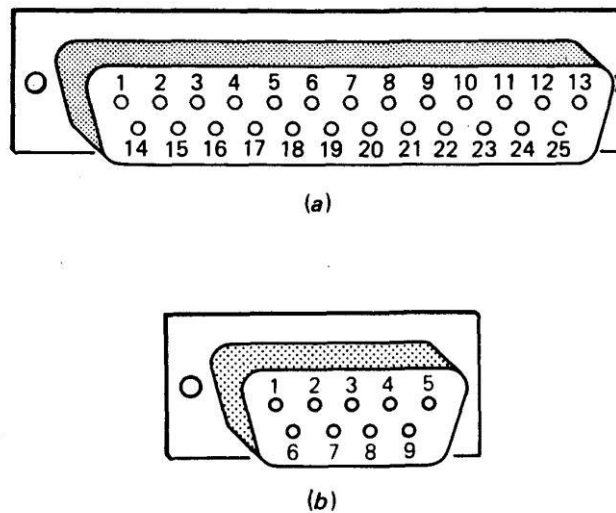


FIGURE 14-7 Connectors often used for RS-232C connections. (a) DB-25P 25-pin male. (b) DE-9P 9-pin male DIN connector.

The voltage levels for all RS-232C signals are as follows. A logic high, or mark, is a voltage between -3V and -15 V under load (-25 V no load). A logic low or space is a voltage between +3 V and +15 V under load (+ 25 V no load). Voltages such as ± 12 V are commonly used.

RS-232C to TTL INTERFACING

Obviously a USART such as the 8251A is not directly compatible with RS-232C signal levels. The standard way to interface between RS-232C and TTL levels is with MCI488 quad TTL-to-RS-232C drivers and MCI489 quad RS-232C-to-TTL receivers shown in Figure 14-8.

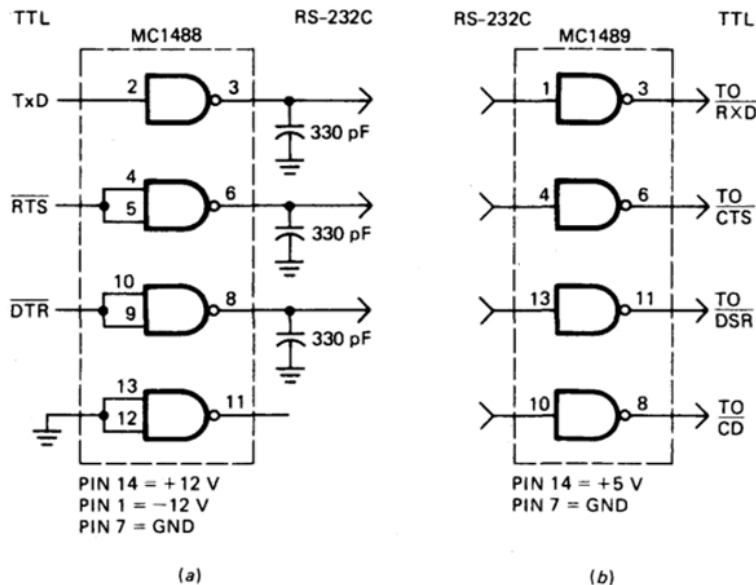


FIGURE 14-8 TTL to RS-232C to TTL signal conversion.
(a) MC1488 used to convert TTL to RS-232C. (b) MC1489 used to convert RS-232C to TTL.

The MC1488s require + and - supplies, but the MC1489s require only +5 V. Note the capacitor to ground on the outputs of the MC1488 drivers is to reduce cross talk between adjacent wires, the rise and fall times for RS-232C signals are limited to 30 V/ μ s.

RS-232C SIGNAL DEFINITIONS

PIN NUMBERS FOR 9 PINS	PIN NUMBERS FOR 25 PINS	COMMON NAME	RS-232C NAME	DESCRIPTION	SIGNAL DIRECTION ON DCE
3 2 7 8	2 3 4 5	TxD RxD RTS CTS	AA BA BB CA CB	PROTECTIVE GROUND TRANSMITTED DATA RECEIVED DATA REQUEST TO SEND CLEAR TO SEND	- IN OUT IN OUT
6 5 1	6 7 8 9 10	DSR GND CD	CC AB CF - -	DATA SET READY SIGNAL GROUND (COMMON RETURN) RECEIVED LINE SIGNAL DETECTOR (RESERVED FOR DATA SET TESTING) (RESERVED FOR DATA SET TESTING)	OUT - OUT -
	11 12 13 14 15		SCF SCB SBA DB	UNASSIGNED SECONDARY RECEIVED LINE SIGNAL DETECTOR SECONDARY CLEAR TO SEND SECONDARY TRANSMITTED DATA TRANSMISSION SIGNAL ELEMENT TIMING (DCE SOURCE)	- OUT OUT IN OUT
4	16 17 18 19 20		SBB DD SCA CD	SECONDARY RECEIVED DATA RECEIVER SIGNAL ELEMENT TIMING (DCE SOURCE) UNASSIGNED SECONDARY REQUEST TO SEND DATA TERMINAL READY	OUT OUT - IN IN
9	21 22 23 24 25		CG CE CH/CI DA	SIGNAL QUALITY DETECTOR RING INDICATOR DATA SIGNAL RATE SELECTOR (DTE/DCE SOURCE) TRANSMIT SIGNAL ELEMENT TIMING (DTE SOURCE) UNASSIGNED	OUT OUT IN/OUT IN -

FIGURE 14-9 RS-232C pin names and signal directions.

Figure 14-9 shows the signal names, signal direction, and a brief description for each of the 25 pins defined for RS-232C. For most applications only a few of these pins are used.

Note that the signal direction is specified with respect to the DCE, this convention is part of the standard. Note that there is both a chassis ground (pin 1) and a signal ground (pin 7). To prevent large ac-induced ground currents in the signal ground, these two should be connected together only at the power supply in the terminal or the computer.

The TxD, RxD, and handshake signals shown with common names in Figure 14-9 are the ones most often used for simple systems. These signals control what is called the *primary or forward* communications channel of the modem. Some modems allow communication over a secondary or *backward* channel, which operates in the reverse direction from the forward channel and at a much lower baud rate. Pins 12, 13, 14, 16, and 19 are the data and handshake lines for this backward channel. Pins 15, 17, 21, and 24 are used for synchronous data communication.